

PREMIUM
VINYL

TARKETT FORCE

commercial vinyl


The champion of durability.

CANASTA 6




PREMIUM
VINYL


TARKETT FORCE

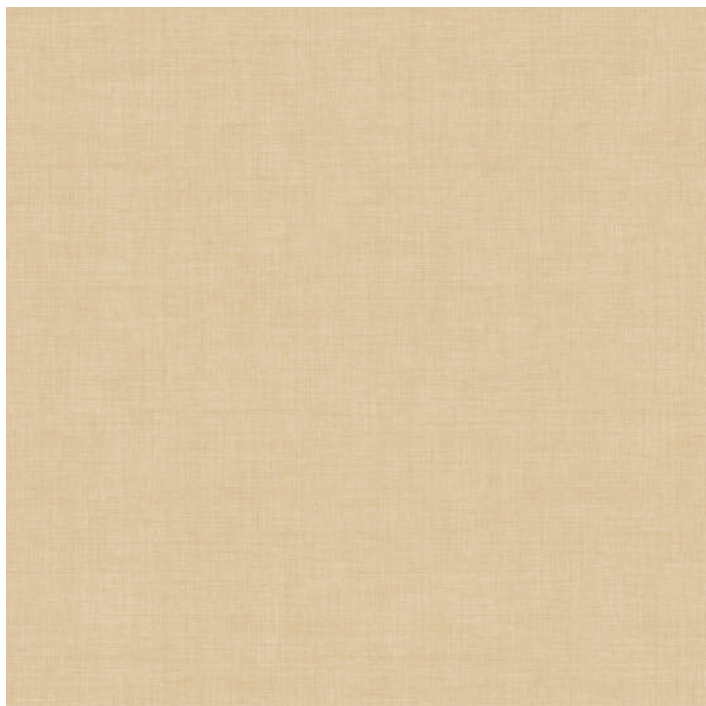


TISSE 1

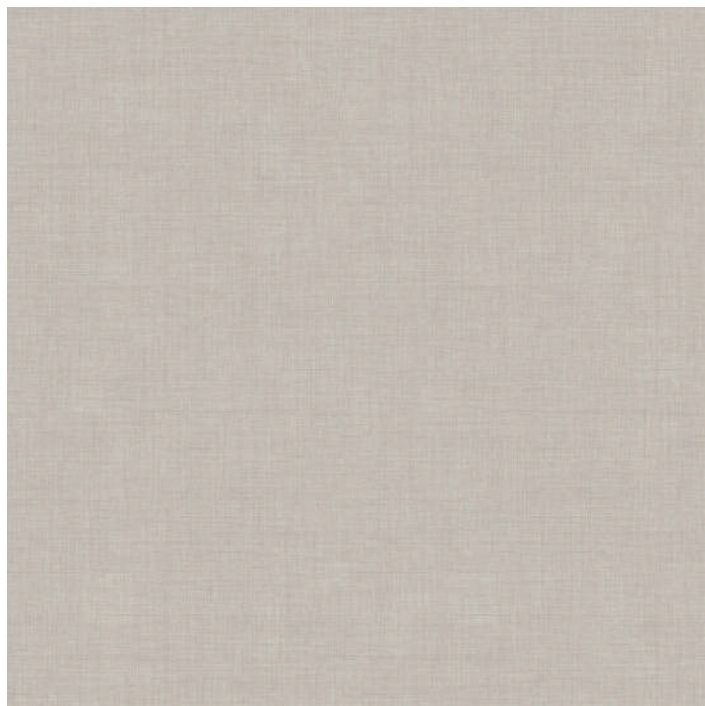

TISSE 2

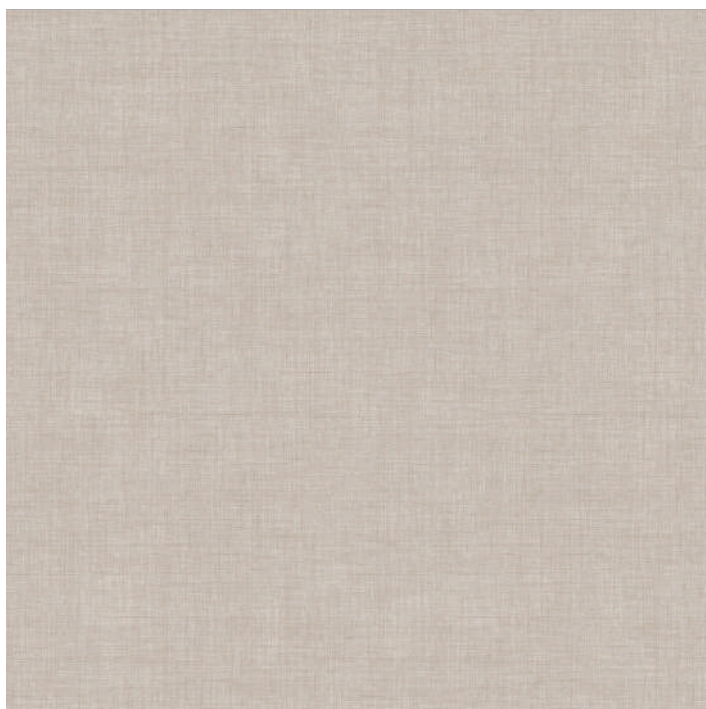


TISSE 3

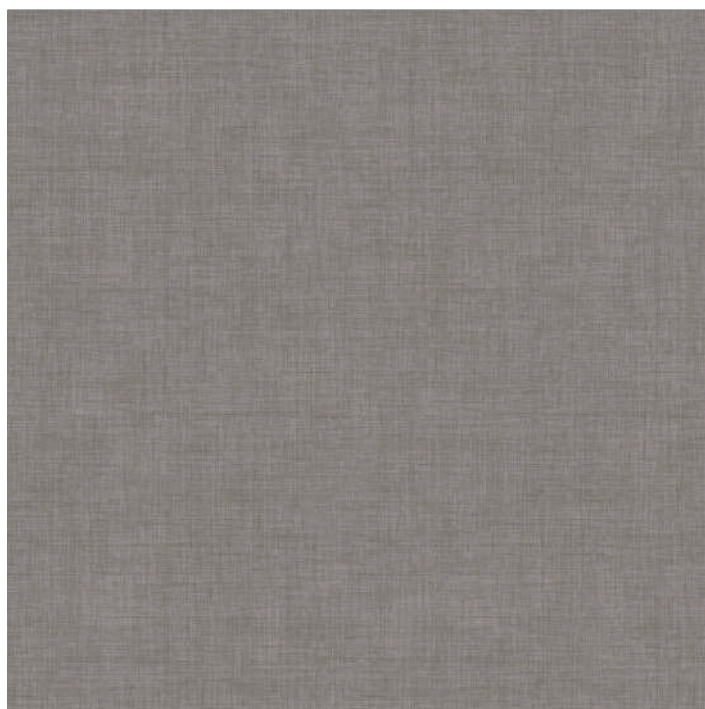

TISSE 4

PREMIUM
VINYL

TARKETT FORCE

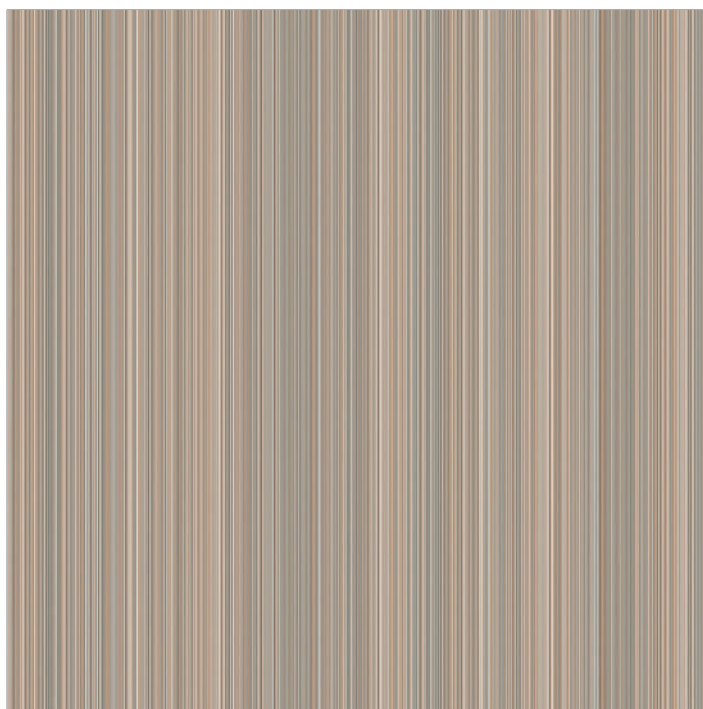

LINEA 4

PREMIUM
VINYL

TARKETT FORCE



CANVAS 1



CANVAS 2



SAMBA 12



MOMBASSA 2

PREMIUM
VINYL

TARKETT FORCE



JAMAICA 3

PREMIUM
VINYL

TARKETT FORCE



SORBONA 6



CANASTA 3



CANASTA 6



MAISON 1

PREMIUM
VINYL

TARKETT FORCE



MAISON 2

TARKETT FORCE

CERTIFICATION AND CLASSIFICATION

Type of flooring	EN 653	Force
		Resilient residential PVC floor covering

CE certification



yes

Classification

ISO 10874

Residential: 23
Commercial: 33

TECHNICAL CHARACTERISTICS

STANDARD

Force

Extreme protection PUR reinforcement

yes

Total thickness

ISO 24346



2,50 mm

Wear layer thickness

ISO 24340



0,60 mm

Total weight

ISO 23997

2,5 kg/m²

Form of delivery - Rolls

ISO 24341

30 lm (15-30lm) x 2,5/3m
25 lm (15-25lm) x 3,5m
22 lm (15-22lm) x 4m

Wear layer binder content

Type I

TECHNICAL PERFORMANCES

STANDARD

Force

Dimensional stability

ISO 23999



≤ 0,1%

Reaction to fire

ISO 13501-1



Bfl - s1; report N° RA08-0414

Residual indentation

ISO 24343-1



≤ 0,20 mm

Impact sound reduction

ISO 717/2



10 dB

Underfloor heating

Suitable provided that
the surface of the subfloor
does not exceed 27°C

Fungi and bacteria resistance

Does not contribute to
infection spreading

Castor chair test

ISO 4918



Excellent

Light fastness

ISO 105 B02 - Method 3

7/8

Thermal resistance

DIN 52612

0,03-0,04 m²K/W