

Heterogeneous vinyl

OMNISPORTS

Play to win

V35, V50, V65, V83 & V120



2021-2023


 **Tarkett**SPORTS
INDOOR




HETEROGENEOUS
VINYL

OMNISPORTS

SPORTS FLOORING SOLUTIONS TO MEET ALL YOUR NEEDS

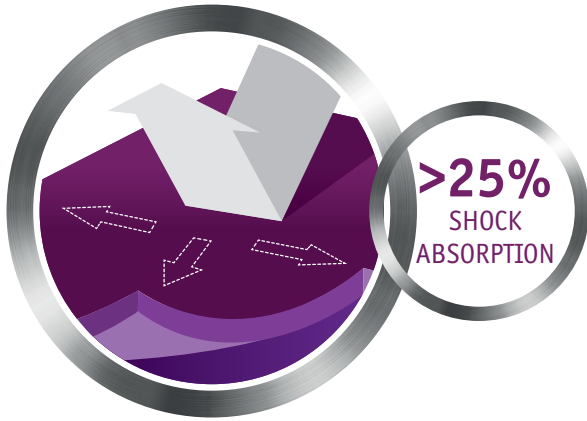

SPORTS FLOORING (EN 14904 CERTIFIED)

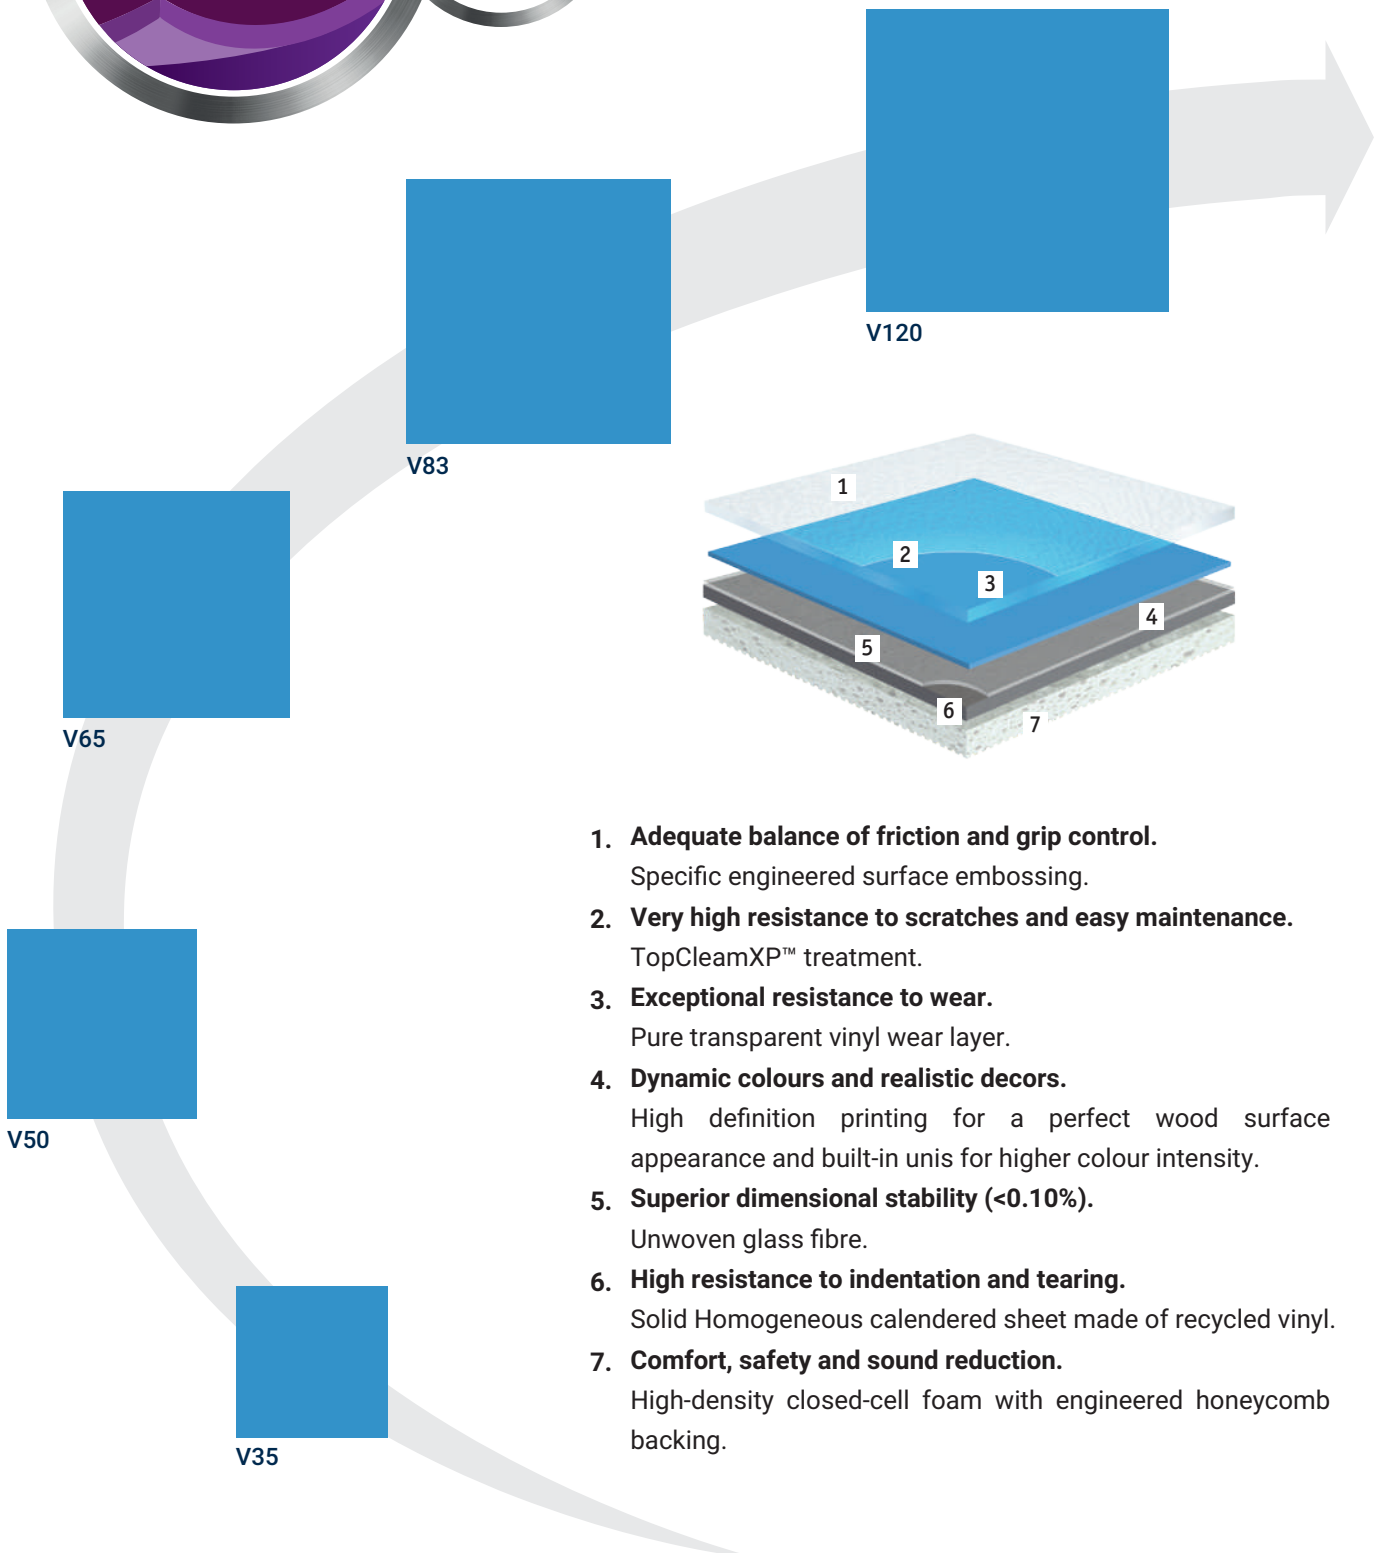

OMNISPORTS

ENJOY PLAYING, FEEL SECURE



Healthier
& safer
environment

PLAY IN A HEALTHIER ENVIRONMENT

- Contribute to friendly sports spaces:

phthalate free
100%

- Allergy UK seal of approval:



- Contribute to lung protection thanks to **extremely low VOC emissions**.

PLAY SAFER

- **Minimise the risk of injury** with integrated cushion backing.
- **Provide shock absorption levels for all ages, weights and levels of play.**



Higher
performance
& versatility

Choose the right product for your facility, from practice in schools to competition level.

- Enhance sports performance* thanks to **good energy return**.
- Guarantee **an adequate & consistent level of ball bounce** for handball, basketball, volleyball and other sports.
- Accomodate **non-sporting events** while providing **ideal performance for sports practice**.
- Provide a **better grip** for control when sliding.
- **Reduce fatigue** throughout sports practice.



More
comfort
& pleasure

- Guarantee **good underfoot comfort**.
- Reduce noise levels thanks to **cushion vinyl acoustic**.
- Allow for personalised installations with a choice of

19 colours



- Boost children's energy levels with **vibrant colours**.



Easy to
maintain,
durable &
sustainable

Appreciate resistance to:

- Stains & scratches.
- Indentation marks.
- Rolling loads.

- **Reduce maintenance costs:**



TopClean XP™ engineered
surface treatment.



HETEROGENEOUS
VINYL

OMNISPORTS V35 (3.45 mm)



Yellow - 200157006



Orange - 200157007



Red - 200157005



Coral - 200157013



Sky Blue - 200157004



Royal Blue - 200157003




Field Green - 200157001



Teal - 200157012



Grey - 200157008

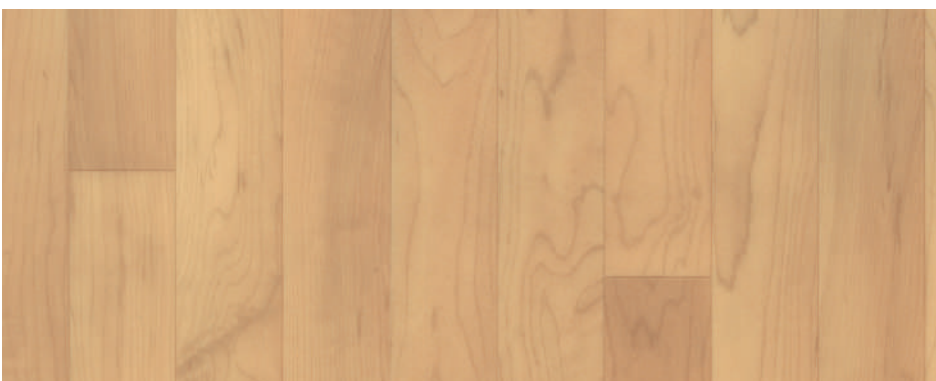

Maple - 200157010



Black - 200157009

HETEROGENEOUS
VINYL

OMNISPORTS V50 (5 mm)



Yellow - 200159006



Orange - 200159007



Red - 200159005



Grey - 200159008




Sky Blue - 200159004




Royal Blue - 200159003



Forest Green - 200159002

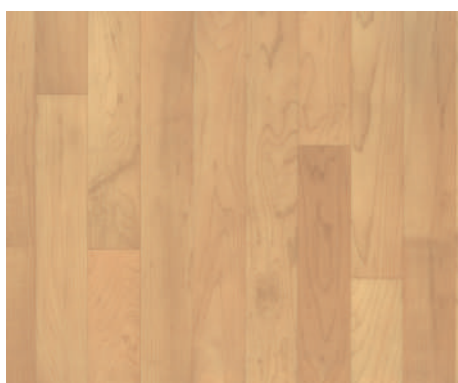

Maple - 200159010

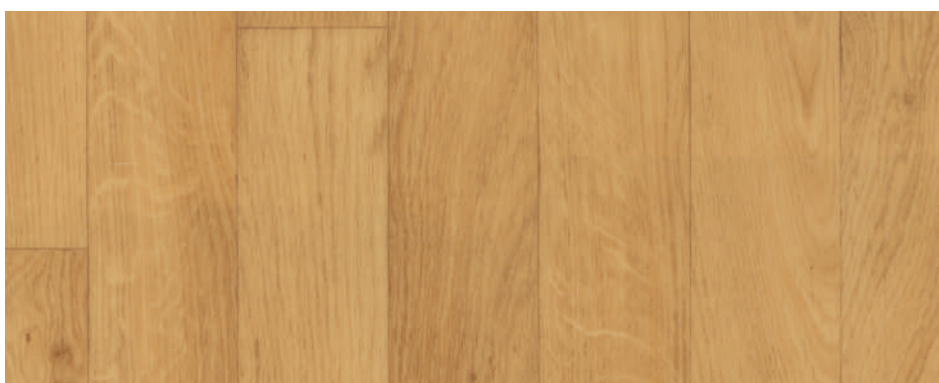

Classic Oak - 200159011



HETEROGENEOUS
VINYL

OMNISPORTS V65 (6.5 mm)



Yellow - 200160006



Orange - 200160007



Red - 200160005



Field Green - 200160001



Sky Blue - 200160004




Royal Blue - 200160003



Grey - 200160008



Black - 200160009

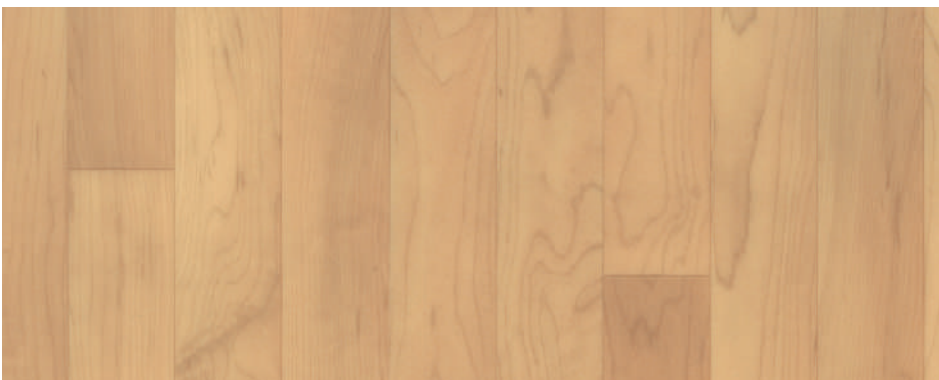

Maple - 200160010 / 200160054



OMNISPORTS REFERENCE - 6,5 mm

■ Wood



Beech

■ 3913001



Dark Beech

■ 3913020

OMNISPORTS REFERENCE - 6,5 mm

■ Unis



Night Blue

■ 3912024



Teal

■ 3912015



Forest Green

■ 3912014



Black

■ 3912010



HETEROGENEOUS
VINYL

OMNISPORTS V83 (8.3 mm)



Yellow - 200161006
(S 3914013)



Orange - 200161007
(S 3914012)




Dark Orange - 200161017
(S 3914021)



Red - 200160005
(S 3914011)



Purple - 200161020
(S 3914025)



Brown - 200161018
(S 3914023)



HETEROGENEOUS
VINYL

OMNISPORTS V83 (8.3 mm)




Sky Blue - 200161004
(S 3914017)



Royal Blue - 200161003
(S 3914016)



Grey - 200161008
(S 3914009)

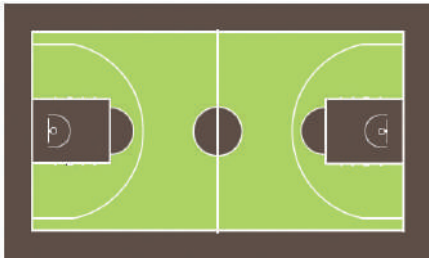

Natural Atmosphere



Mint Green - 200161019
(S 3914026)




Light Green - S 3914020



Maple - 200161010
(S 3915002)



Gunstock Oak - S 3915004

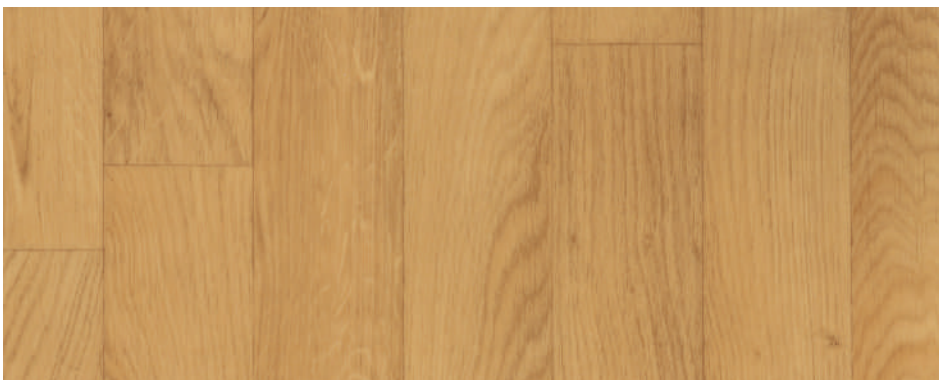

Classic Oak - 200161011
(S 3915003)



OMNISPORTS

TECHNICAL / MARKETING PRODUCT CHARACTERISTICS

PVC Sports floor covering	Standard	V35	V50	V65	V83	V120
Product Characteristics						
Total thickness	EN 428	3.45 mm	5 mm	6.5 mm	8.3 mm	12 mm
Wear layer thickness	EN 429	0.65mm	0.5 mm	0.7 mm	0.7 mm	0.8 mm
Weight	EN 430	3.160 kg/m ²	3.600 kg/m ²	4.300 kg/m ²	6.095 kg/m ² 5.130 kg/m ²	6.800 kg/m ²
Surface treatment-additional PU protection		Top Clean XP	Top Clean XP	Yes	Yes	Top Clean XP
Surface treatment-chemical / mechanical embossing		Normal	Normal	Normal	Normal	Normal
Hygiene		Does not Contribute to infection spreading	Does not Contribute to infection spreading	Does not Contribute to infection spreading	Does not Contribute to infection spreading	Does not Contribute to infection spreading
TVOC after 28 days	ISO 16000	< 100 µg/m ³	< 100 µg/m ³	< 100 µg/m ³	< 100 µg/m ³	< 100 µg/m ³
Reduction of Impact Sound Insulation	ISO 140-8/ISO 717-2	> 18	> 18	> 18	> 18	> 18

Marketing Characteristics						
Hygienic attest		Pass	Pass	Pass	Pass	Pass
Roll length	-	20.5 m	20.5 m	20.5 m	20.5 m	15 m
Roll width	EN 426	2 m	2 m	2 m	2 m	2 m
Branded	EN 426	Tarkett	Tarkett	Tarkett	Tarkett	Tarkett
Back printing		Yes	Yes	Yes	Yes	Yes
Back embossing		Yes	Yes	Yes	Yes	Yes
Gurantee, Year		10 yrs	10 yrs	10 yrs	10 yrs	10 yrs

Installation Method						
Loose lay, double-sided adhesive tape		≤ 25 m ²	≤ 25 m ²	≤ 25 m ²	≤ 25 m ²	≤ 25 m ²
Adhesive		> 25 m ²	> 25 m ²	> 25 m ²	> 25 m ²	> 25 m ²

TARKETT PRODUCT CHARACTERISTICS

Physical Performance	Standard	Result	Result	Result	Result	Result
Vertical deformation	EN 14809	0.06	≤ 5.0	1.1	2.0	2.0
Vertical ball rebound	EN 12235	99	≥ 90	98	96	96
Friction	EN 13036-4	90	90 - 110	92	82	82
Dimensional stability after exposure to heat	EN ISO 23999	≤ 0.04	≤ 0.04	≤ 0.04	≤ 0.04	≤ 0.04
Curling after exposure to heat	EN ISO 23999	≤ 8	≤ 8	≤ 8	≤ 8	≤ 8
Light resistance	ISO 105-B02	≥ 6	≥ 6	≥ 6	≥ 6	≥ 6
Chemical resistance	EN ISO 26987	Resistant	Resistant	Resistant	Resistant	Resistant
Resistance to wear	EN ISO 5470-1	0.12	≤ 1.0	0.13	0.09	0.09
Specular gloss	EN ISO 2813	17	≤ 30	21		
Resistance to a rolling load	PN-EN 1569	0.3		≤ 0.5	0.25	0.25
		No Damage		No Damage	No Damage	No Damage
Resistance to impact	EN 1517	No Damage	No Damage	No Damage	No Damage	No Damage
Resistance to indentation	NF EN 1516	0.04	< 0.50	0.26	0.5	0.5
Possibility to install in rooms with floor heating	-	27°C	27°C	27°C	27°C	27°C
Shock absorption	NF EN 14808	≥ 4%	≥ 17%	29 (P1)	45 (P2)	45 (P3)
Fire resistance	EN 13501-1	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1	Bfl-s1