

PREMIUM
COLLECTION
HOMOGENEOUS COMPACT VINYL



“Improved indoor environment and air quality”

Indoor Environment & Air Quality

Tarkett flooring aims to provide tangible environmental and health benefits to flooring users, particularly in sensitive areas like schools and hospitals. The Premium collection includes two eco-innovations that contribute to improve indoor environment and air quality.



The phthalate-free plasticizers selected by Tarkett are approved for food contact containers and can be used for toys intended to be placed in the mouth by children



Extremely low VOC emissions
100 times lower than the strictest standards in Europe and certified Platinum

PRIMO PREMIUM




Available in Rolls


Price Level




21010 651 Light Pure Grey

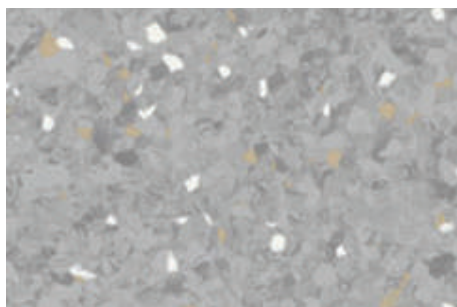


21010 671 Medium Dark Pure Grey

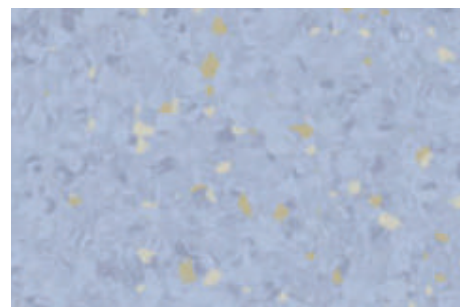


21010 682 Light Blue

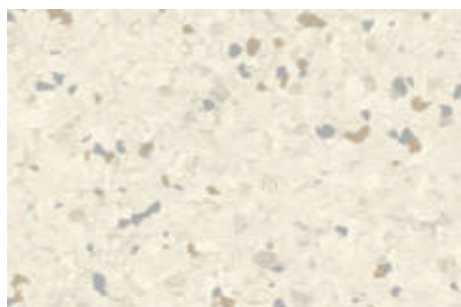


21010 678 Light Beige

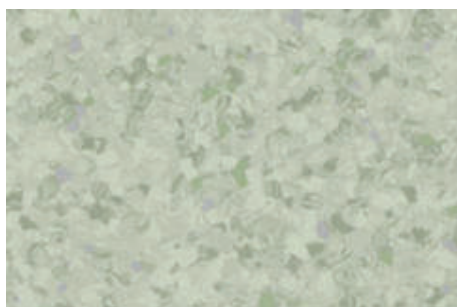


21010 679 Light Green

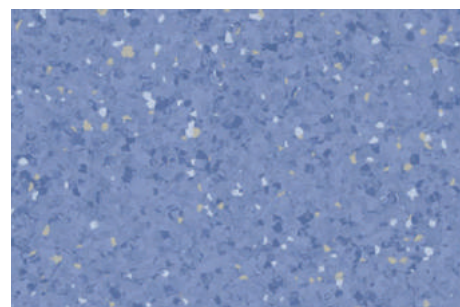

21010 665 Medium Blue

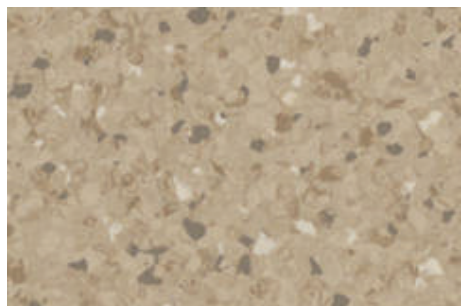


21010 659 Dark Warm Beige

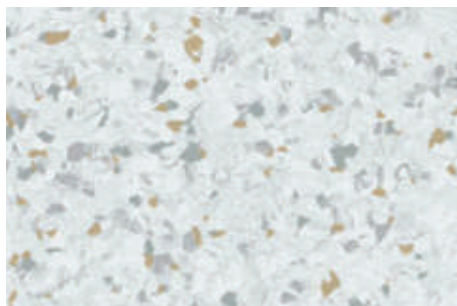

21010 688 Light Denium Blue

Multi-colour
welding rods

> Colour and pattern coordinated welding rods are available for every colour in the Premium Collection. With contrasting colour chips that coordinate with the flooring's accent colour and design, the welding rods always provide the perfect finishing touch.

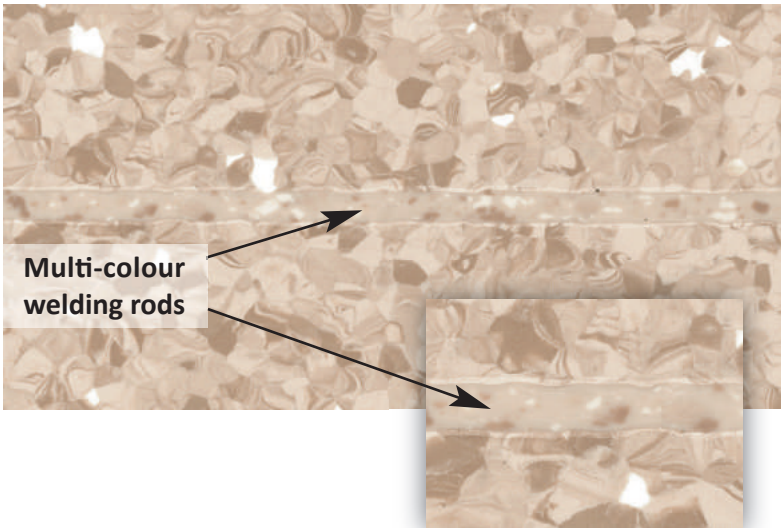


Eclipse Premium Spirit	Welding Rod No.
21020 963	1290 166
21020 964	1290 167
21020 965	1290 168
21020 972	1290 128
21020 973	1290 174
21020 979	1290 205
21020 980	1290 178
21020 976	1290 177
21020 994	1290 210
21020 732	1290 166
21020 736	1290 202
21020 728	1290 216
Eclipse Premium Classic	Welding Rod No.
21020 004	1290 270
21020 018	1290 269
21020 010	1290 265
21020 067	1290 272
21020 647	1290 194
21020 039	1290 028
21020 649	1290 196
21020 036	1290 264
21020 645	1290 193
Primo Premium	Welding Rod No.
21010 651	1290 152
21010 659	1290 160
21010 665	1290 164
21010 671	1290 022
21010 678	1290 232
21010 679	1290 219
21010 682	1290 234
21010 688	1290 223
Primo SD	Welding Rod No.
21012 561	1290 274
21012 562	1290 275
21012 565	1290 278
21012 567	1290 280
21012 569	1290 282
Primo Safe.T	Welding Rod No.
21013 790	1290 283
21013 794	1290 287
21013 795	1290 288
21013 799	1290 292
21013 806	1290 299

ECLIPSE PREMIUM CLASSIC COLLECTION



Available in Rolls Price Level

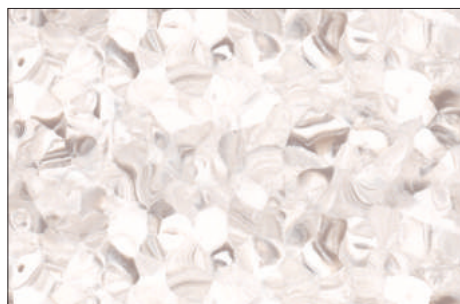

 21020 645 Light Cool Beige




 21020 036 Medium Warm Beige




 21020 647 Dark Cool Beige



 21020 039 Medium Pure Grey

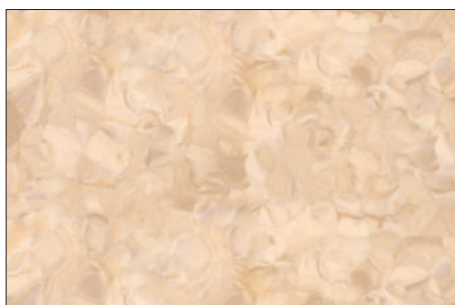

 21020 004 Medium Gold

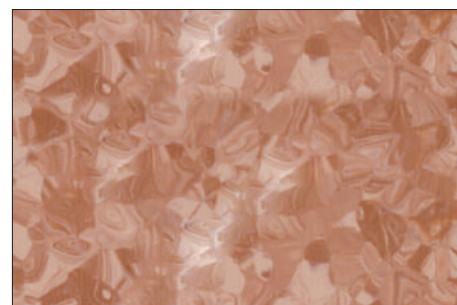


 21020 018 Terracotta



 21020 067 Medium Grey Blue




 21020 649 Light Green

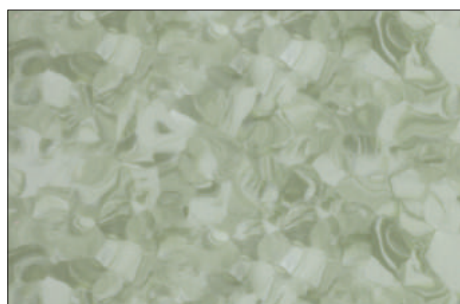

 21020 010 Medium Green

Make your balanced choice

Tarkett's approach to sustainability is all about giving our customers simple and clear information so they can make the right choice of flooring, balancing their project and budget requirements beside the need for sustainable solutions

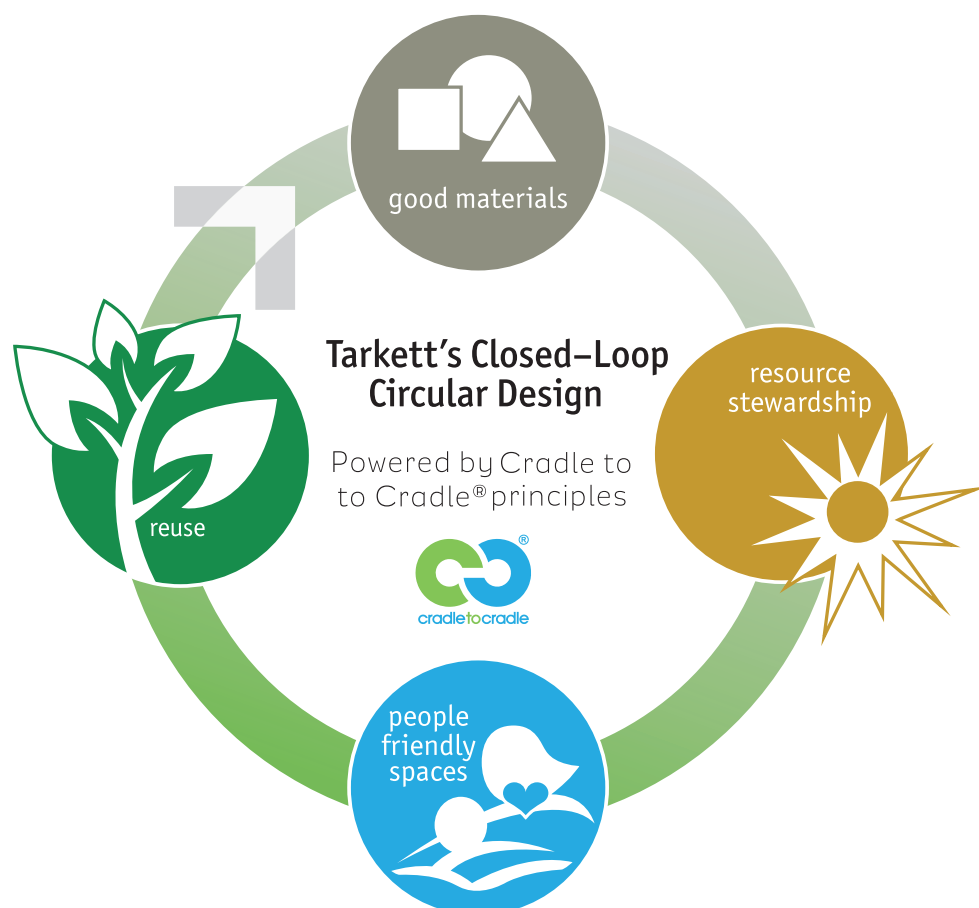

ECLIPSE PREMIUM SPIRIT COLLECTION



Available in Rolls Price Level



 **21020 964** Medium Pure Grey



 **21020 965** Medium Dark Pure Grey



 **21020 972** Light Beige




 **21020 963** Light Pure Grey




 **21020 979** Medium Blue




 **21020 976** Medium Green

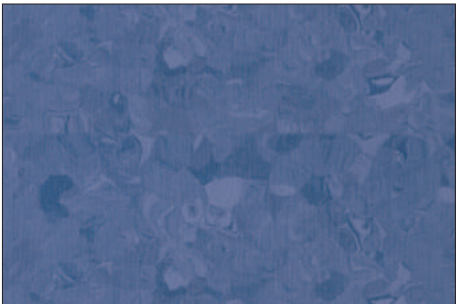

 **21020 980** Dark Blue

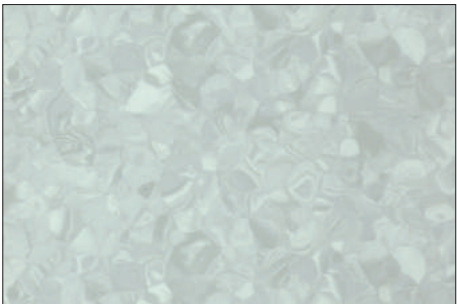

 **21020 736** Light Grey Green

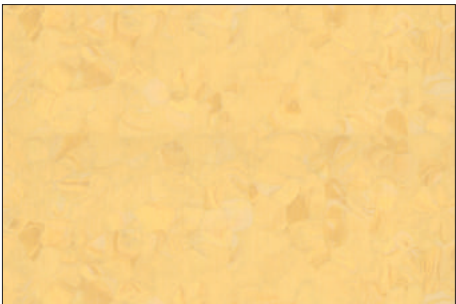


 **21020 732** Yellow



 **21020 994** Medium Yellow Beige



 **21020 728** Brown

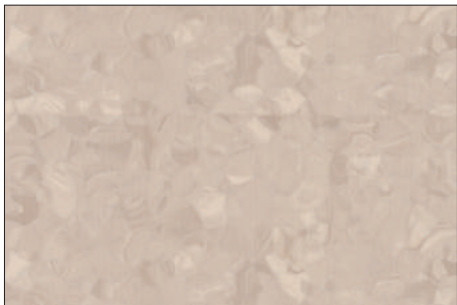


 **21020 973** Medium Warm Beige

PRIMO SD



Static dissipative



Available in Rolls & Tiles




Price Level



21012 **561**
 21016 **561**


Medium Pure Grey

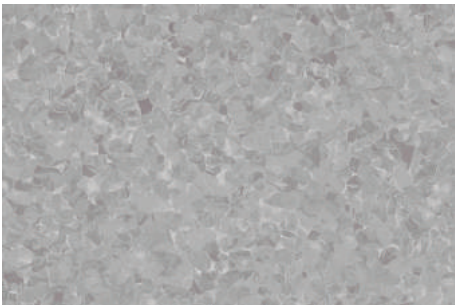


21012 **562** Medium Dark Pure Grey
 21016 **562**



21012 **565** Medium Warm Beige
 21016 **565**

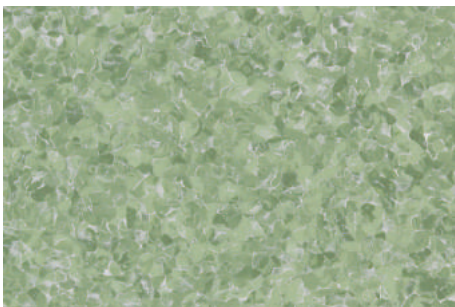

21012 **567** Medium Green
 21016 **567**

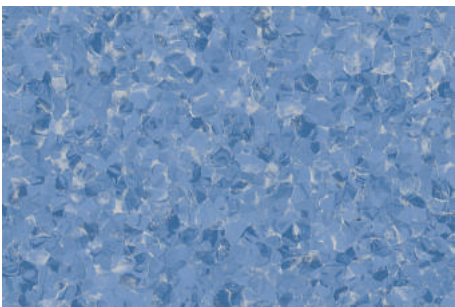

21012 **569** Medium Blue
 21016 **569**

PRIMO SAFE.T



R10, Slip Resistant



Available in Rolls



Price Level



21013 **790** Light Pure Grey




21013 **794** Medium Cool Grey



21013 **795** Dark Cool Grey



21013 **799** Light Beige

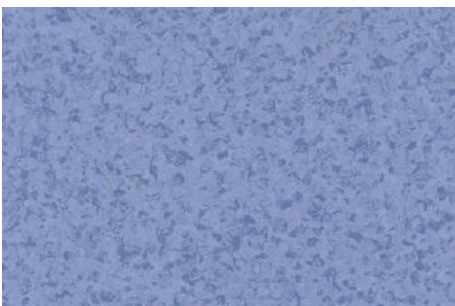

21013 **806** Medium Blue




*“Enhanced
life-cycle cost for
building owners”*

Low Cost & Simplified Maintenance

Premium benefits from a special PUR reinforcement* that seals and hardens the surface to make it more resistant to dirt and daily wear and tear, as well as simplifying cleaning and maintenance.



**No additional surface
treatment needed**



Flexible flooring solutions
for **perfect coving** results
and improved maintenance



Significantly reduces use of
water, energy and chemical
detergents for a **better
environmental footprint
and excellent life-cycle cost**



Specially designed **for heavy
traffic zones** where hygiene
and resistance are critical
such as schools, hospitals and
public buildings

* Except Primo SD

PREMIUM COLLECTION

Specification

The Premium Collection are homogeneous, high-quality vinyl floorings for most types of premises such as schools, healthcare facilities and other types of public buildings. Its Unique colour, design and function coordination system allows endless combination possibilities. Beneficiary easy and low cost maintenance enhance the life cycle cost. The Premium Collection are produced with phthalate-free technology and improved indoor air quality.

TECHNICAL DATA	STANDARDS	Eclipse Premium	Primo Premium	Primo Safe.T	Primo SD
CERTIFICATION & CLASSIFICATION					
Type of Floorcovering	ISO 10584 - EN 649	Homogeneous vinyl flooring	Homogeneous vinyl flooring	-	Static dissipative pressed homogeneous vinyl flooring
	EN 13843	-	-	Slip resistant homogeneous vinyl flooring	-
Binder Content	ISO 10581	Type I	Type I	-	Type I
CE Certification	EN 14041	Yes	Yes	Yes	Yes
Classification	ISO 10874 - EN 685	Commercial : 34	Commercial : 34	Commercial : 34	Commercial : 34
		Industrial : 43	Industrial : 43	Industrial : 43	Industrial : 43
ISO Certification		Ronneby ISO 9001/Ronneby ISO 14001	Ronneby ISO 9001/Ronneby ISO 14001	Ronneby ISO 9001/Ronneby ISO 14001	Ronneby ISO 9001/Ronneby ISO 14001
TECHNICAL CHARACTERISTICS					
Surface Treatment		PUR reinforced	PUR reinforced	Safe.T Clean	PUR reinforced
Total Thickness	ISO 24346 - EN 428	2.0 mm	2.0 mm	2.0 mm	2.0 mm
Total Weight	ISO 23997 - EN 430	3000 g/m ²	3000 g/m ²	3000 g/m ²	3000 g/m ²
Form of Delivery	ISO 24341 - EN 426	Approx. 23 r m x 200 cm	Approx. 23 r m x 200 cm	Approx. 23 r m x 200 cm	Approx. 23 r m x 200 cm
	Sheet (Rolls)	art. no. 21020 ___ (3 digit colour number)	art. no. 21010 ___ (3 digit colour number)	art. no. 21013 ___ (3 digit colour number)	art. no. 21012 ___ (3 digit colour number)
	ISO 24342 - EN 427				61 x 61 cm - 16 tiles / box = 5.95 m ²
	Tiles (Box)				art. no. 21016 ___ (3 digit colour number)
TECHNICAL PERFORMANCE					
Dimensional Stability	ISO 23999 - EN 434	≤ 0.40 % for rolls	≤ 0.40 % for rolls	≤ 0.40 % for rolls	≤ 0.40 % for rolls
		-	-	-	≤ 0.25 % for tiles
Reaction to Fire	EN 13501-1	Class B _f s1	Class B _f s1	Class B _f s1	Class B _f s1
	EN ISO 9239-1	≥ 8 kW/m ²	≥ 8 kW/m ²	≥ 8 kW/m ²	≥ 8 kW/m ²
	EN ISO 11925-2	Pass	Pass	Pass	Pass
Abrasion Volume Loss	EN 660: Part 2	Group P: ≤ 4.0 mm ³	Group P: ≤ 4.0 mm ³	Group P: ≤ 4.0 mm ³	Group P: ≤ 4.0 mm ³
Residual Indentation	ISO 24343-1-EN 433	Required value: ≤ 0.10 mm	Required value: ≤ 0.10 mm	Required value: ≤ 0.10 mm	Required value: ≤ 0.10 mm
		Average measured value: 0.03 mm	Average measured value: 0.03 mm	Average measured value: 0.03 mm	Average measured value: 0.03 mm
Castors Chair Test	ISO 4918 - EN 425	Suitable	Suitable	Suitable	Suitable
Flexibility	ISO 24344 - EN 435	Pass	Pass	Pass	Pass
Static Electrical Discharge	EN 1815	< 2 kV	< 2 kV	< 2 kV	< 2 kV
Clean Room Test	ASTM F24 F51	Class A	Class A	-	-
	ISO 14644-1	-	ISO class 4	-	-
Ease of Decontamination	ISO 8690	Good	Good	-	Good
Electrical Insulation	VDE 0100, Part 600	-	-	-	Ri ≥ 5 x 104 Ohms
Electrical Resistance	EN 1081	-	-	-	R1 ≤ 108 Ohms
Total VOC Emissions	AgBB/DIBt	≤ 10 µg/m ³ (after 28 days)	≤ 10 µg/m ³ (after 28 days)	≤ 10 µg/m ³ (after 28 days)	≤ 10 µg/m ³ (after 28 days)
	Indoor air quality	Platinum	Platinum	Platinum	Platinum
Underfloor Heating		Suitable - max. 27° C	Suitable - max. 27° C	Suitable - max. 27° C	Suitable - max. 27° C
Thermal Resistance	EN 12667/DIN 52612	Approx. 0.01 m ² K/W	Approx. 0.01 m ² K/W	Approx. 0.01 m ² K/W	Approx. 0.01 m ² K/W
Light Fastness	EN ISO 105-B02	≥ level 6	≥ level 6	≥ level 6	≥ level 6
Chemical Resistance	EN 423	Good resistance	Good resistance	Good resistance	Good resistance
Bacteria Resistance	EN ISO 846: Part C	Does not favour growth	Does not favour growth	Does not favour growth	Does not favour growth
Slip Resistance	DIN 51130	R9	R9	R10	R9
	EN 13893	≥ 0.3	≥ 0.3	≥ 0.3	≥ 0.3
	BS 7976-2	Low risk of slip	Low risk of slip	Low risk of slip	Low risk of slip
Bare Foot Test	DIN 51097	-	-	Class B (≥ 18°)	-
Seam Strength	EN 684	Average value: ≥ 240 N/50 mm	Average value: ≥ 240 N/50 mm	Average value: ≥ 240 N/50 mm	Average value: ≥ 240 N/50 mm
		Individual values: ≥ 180 N/50 mm	Individual values: ≥ 180 N/50 mm	Individual values: ≥ 180 N/50 mm	Individual values: ≥ 180 N/50 mm
Colours		23	8	5	5

The above information is subject to modification for the benefit of further improvement.
Tarkett's instructions regarding installation, cleaning and maintenance should be observed.

