

Primo Premium

HOMOGENEOUS COMPACT VINYL

Combine
& Create



Powered by



 **Tarkett**

Primo Premium




Light Beige

21010 678



Medium Cool Beige

21010 657

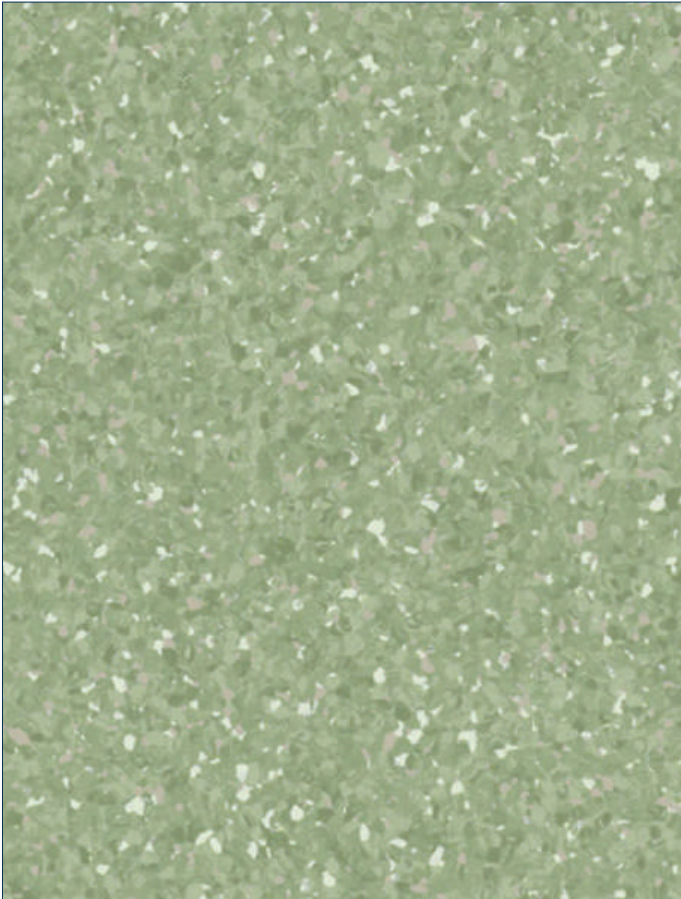

Medium Green

21010 680



Primo Premium



Light Pure Grey

21010 **651**




Medium Cool Grey

21010 **673**




Primo Premium

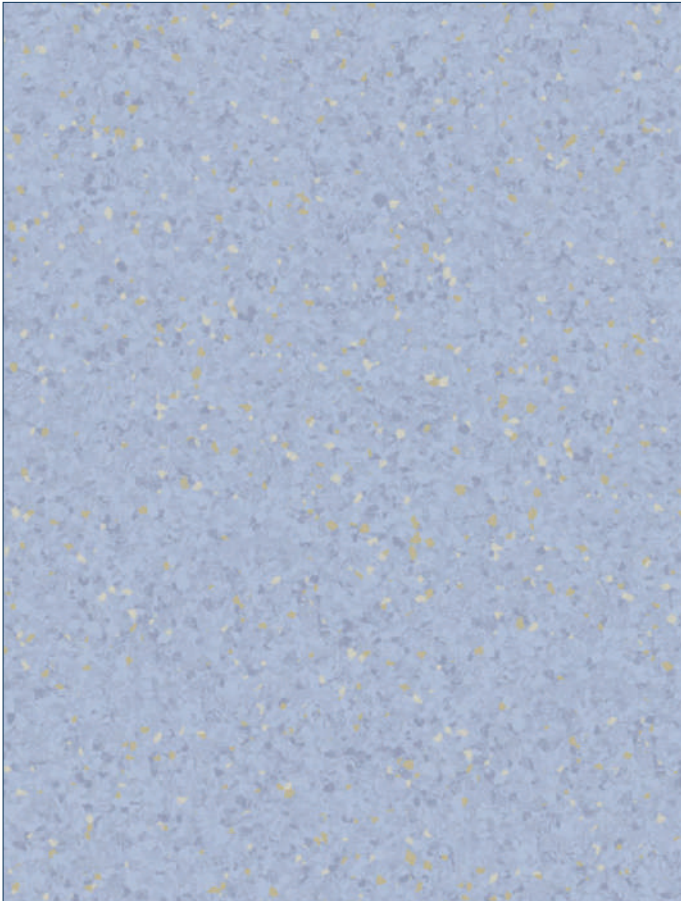


Light Blue

21010 **682**

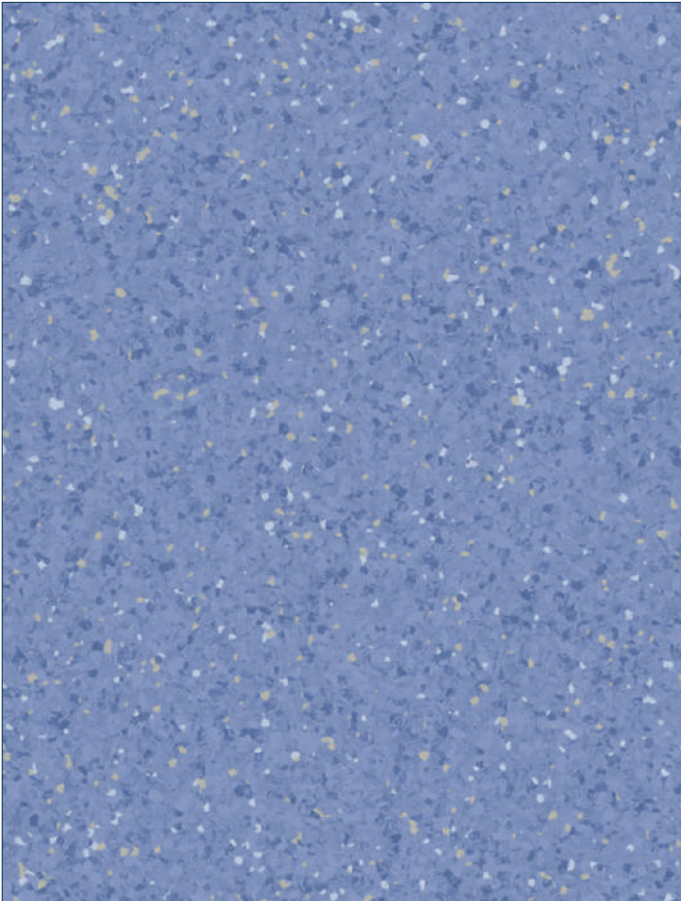

Medium Blue


21010 **665**

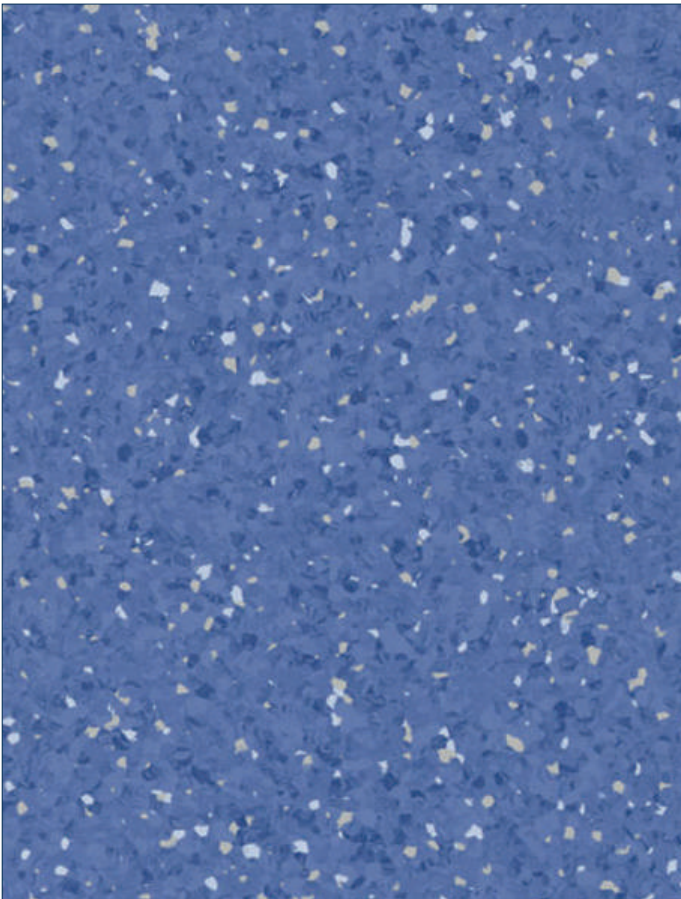

Dark Blue

21010 **666**

Primo Premium

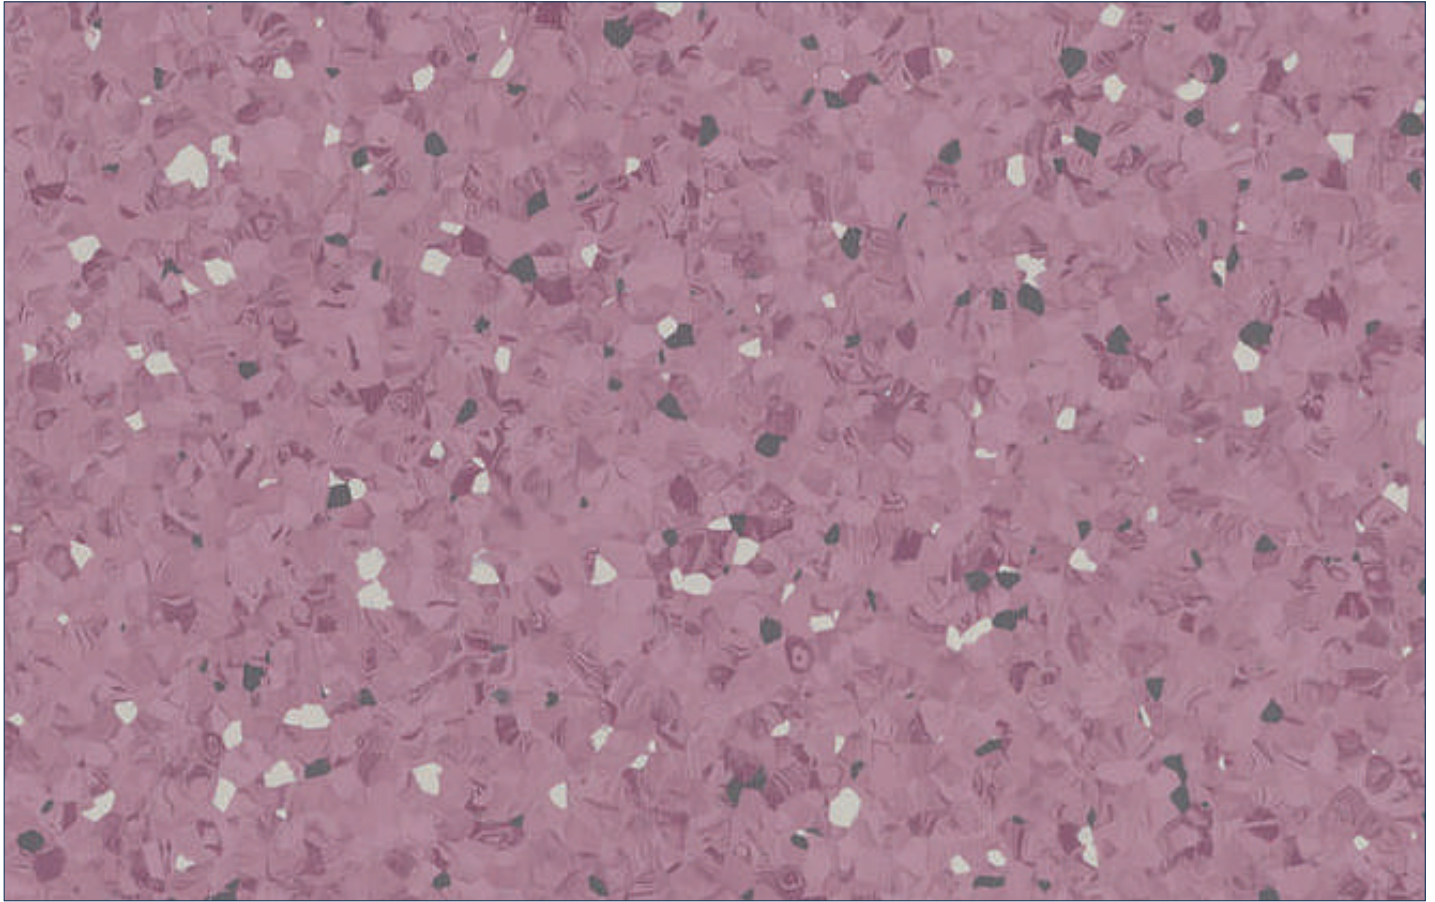

Soft Purple

21010 663



Coordinated Welding rods


| Colours | Colour Code | Welding Rods Multicolours |
|-------------------|-------------|---------------------------|
| Light Pure Grey | 21010651 | 1290 152 |
| Medium Cool Beige | 21010657 | 1290 158 |
| Medium Blue | 21010665 | 1290 164 |
| Dark Blue | 21010666 | 1290 165 |
| Medium Cool Grey | 21010673 | 1290 225 |
| Light Beige | 21010678 | 1290 232 |
| Medium Green | 21010680 | 1290 059 |
| Light Blue | 21010682 | 1290 234 |
| Soft Purple | 21010663 | 1290 386 |

Primo Premium

| TECHNICAL DATA | STANDARD | PRIMO PREMIUM |
|---|-----------------------------------|--|
| CLASSIFICATION | | |
| Classification | ISO 10581 | Homogeneous vinyl flooring |
| | EN ISO 10874 | 34-43 |
| Wear layer binder content | ISO 10581 | Type I |
| TECHNICAL CHARACTERISTICS | | |
| Total thickness | EN ISO 24346 | 2.0 mm |
| Total weight | EN ISO 23997 | 3000 g/m ² |
| Surface treatment | | PUR reinforced |
| Form of delivery | EN ISO 24341 Sheet (rolls) | Approx. 23 m x 200 cm art. no. 21010 _ _ _ |
| PERFORMANCE FOR CE MARKING REQUIREMENTS (EN 14041) | | |
| Declaration of Performance | EN 14041 | 0019-0018-DoP-2013-07 |
| Reaction to fire | EN 13501-1 | Class B _s -S1 |
| | EN ISO 9239-1 | ≥ 8 kW/m ² |
| | EN ISO 11925-2 | Pass |
| Electrostatic properties | EN 1815 | < 2 kV |
| Thermal resistance | EN 12667/DIN 52612 | Approx. 0.01 m ² K/W |
| Slip resistance | EN 13893 | ≥ 0.3 |
| | BS 7976-2 | Low risk of slip |
| TECHNICAL PERFORMANCES | | |
| Residual indentation | EN ISO 24343-1 | Required value: ≤ 0.10 mm Average measured value: 0.03 mm |
| Slip resistance | DIN 51130 | R9 |
| Clean room test | ASTM F24 F51 | Class A |
| Ease of decontamination | ISO 8690 | Good |
| Bacteria resistance | EN ISO 846: Part C | Does not favour growth |
| Chemical resistance | ISO 26987 | Good resistance |
| Castor Chair | ISO 4918 | Suitable |
| Flexibility | ISO 24344 | Pass |
| Dimensional stability | EN ISO 23999 | ≤ 0.40% for rolls |
| Light fastness | EN ISO 105-B02 | ≥ 6 |
| Seam strength | EN 684 | Individual values : ≥ 400 N/50 mm |
| Underfloor heating | | Suitable - max. 27°C |
| ENVIRONMENTAL PERFORMANCES | | |
| Total VOC emissions | ISO 16000-9 Indoor air quality | ≤ 10µg/m ³ (after 28 days) Platinum |
| COLOURS | | |

9

The above information is subject to modification for the benefit of further improvement.
Tarkett's instructions regarding installation, cleaning and maintenance should be observed.



Powered by



MADE IN SWEDEN

