

# Primo Safe.T

HOMOGENEOUS COMPACT VINYL

Combine  
& Create



 **Tarkett**

# Primo Safe.T



R10, Slip Resistant



Light Pure Grey


21013 790

Medium Pure Grey

21013 791



# Primo Safe.T

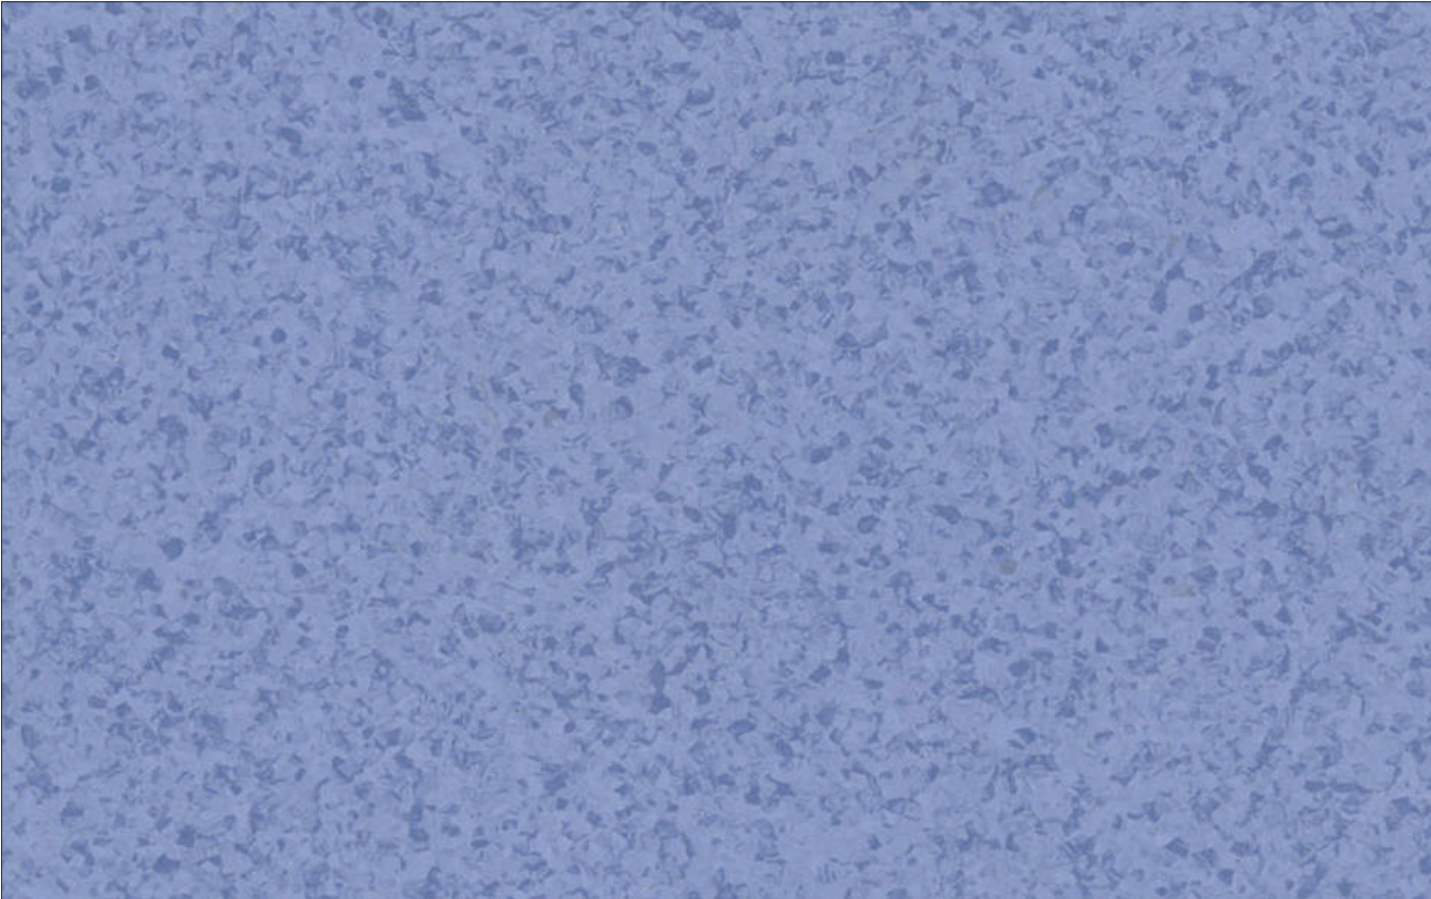

Medium Blue

# Primo Safe.T



Medium Cool Grey

21013 **794**



Dark Cool Grey

21013 **795**



# Primo Safe.T



Light Beige

21013 799



## Coordinated Welding rods


Colours	Colour Code	Welding Rods Multicolours
Light Pure Grey	21013790	1290 369
Medium Pure Grey	21013791	1290 284
Medium Cool Grey	21013794	1290 287
Dark Cool Grey	21013795	1290 288
Medium Blue	21013806	1290 299
Light Beige	21013799	1290 292

# Primo Safe.T

TECHNICAL DATA	STANDARD	PRIMO SAFE.T
<b>CLASSIFICATION</b>		
Classification	ISO 10581 EN ISO 10874	Slip resistant homogeneous vinyl flooring 34-43
<b>TECHNICAL CHARACTERISTICS</b>		
Total thickness	EN ISO 24346	2.0 mm
Total weight	EN ISO 23997	3000 g/m <sup>2</sup>
Surface treatment		Safe.T clean XP™
Form of delivery	EN ISO 24341 Sheet	Approx. 23 lm x 200 cm Art. no. 21013 _ _ _ 3 digit colour number
<b>PERFORMANCE FOR CE MARKING REQUIREMENTS (EN 14041)</b>		
Declaration of Performance	EN 14041	0019-0048-DoP-2013-07
Reaction to fire	EN 13501-1 EN ISO 9239-1 EN ISO 11925-2	Class B <sub>s</sub> -S1 ≥ 8 kW/m <sup>2</sup> Pass
Electrostatic properties	EN 1815	< 2 kV
Thermal resistance	EN 12667/DIN 52612	Approx. 0.01 m <sup>2</sup> K/W
Slip resistance	EN 13893 BS 7976-2	≥ 0.3 Low risk of slip
<b>TECHNICAL PERFORMANCES</b>		
Residual indentation	EN ISO 24343-1	Required value: ≤ 0.10 mm Best measured value*: 0.03 mm
Slip resistance	DIN 51130	R10
Bacteria resistance	EN ISO 846: Part C	Does not favour growth
Chemical resistance	ISO 26987	Good resistance
Castor Chair	ISO 4918	Suitable
Flexibility	ISO 24344	Pass
Dimensional stability	EN ISO 23999	≤ 0.40%
Light fastness	EN ISO 105-B02	≥ 6
Bare foot test	DIN 51097	Class B (≥ 18°)
Seam strength	EN 684	Individual values : ≥ 400 N/50 mm
Underfloor heating		Suitable - max. 27°C
<b>ENVIRONMENTAL PERFORMANCES</b>		
Total VOC emissions	ISO 16000-9 Indoor air quality	≤ 10µg/m <sup>3</sup> (after 28 days) Platinum
<b>COLOURS</b>		

6

The above information is subject to modification for the benefit of further improvement.  
Tarkett's instructions regarding installation, cleaning and maintenance should be observed.



MADE IN SWEDEN

**Tarkett**