Tapiflex Excellence 65 Uni

ACOUSTIC HETEROGENEOUS VINYL

Tarkett

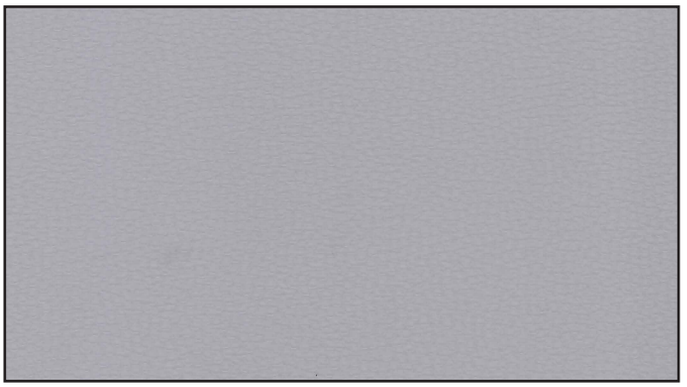

Medium Grey 25016 **017**

Grass Green 25016 **009**

Lemon Yellow 25016 **019**

Dark Blue 25016 **029**

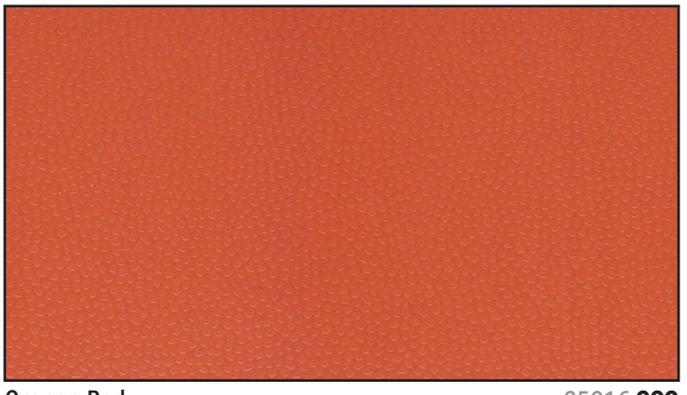

Orange Red 25016 **000**

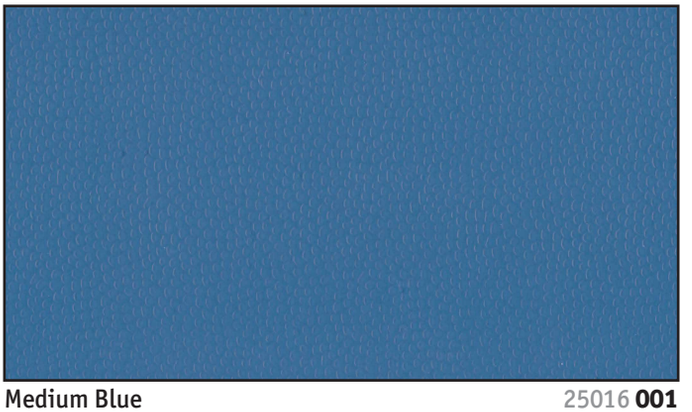

Medium Blue 25016 **001**

Dark Red 25016 **010**

Dark Grey 25015 **016**

Dark Beige 25016 **018**

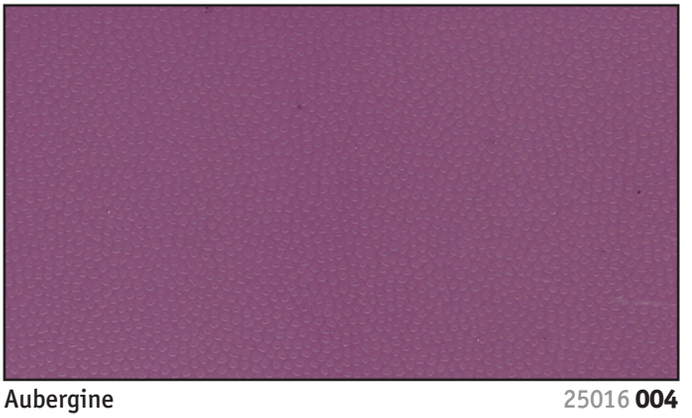

Aubergine 25016 **004**

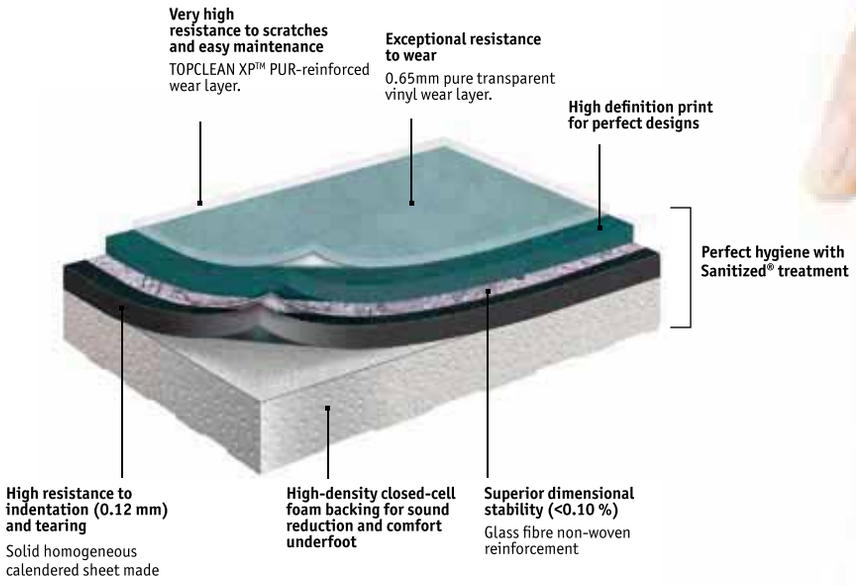

Sustainable product lines

Great acoustic properties with Tapiflex Excellence

With its foam backing the acoustic efficiency of Tapiflex Excellence is **19 dB**. Its unique structure **made of recycled vinyl** offers high indentation resistance (0.12 mm). Its pure vinyl top layer is reinforced with our **TOPCLEAN XP™** polyurethane treatment that increases its resistance to abrasion and scratches. The **Sanitized®** treatment is also applied. The **TOPCLEAN XP™** treatment also eliminates wax or polish for life, which significantly reduces maintenance costs.

Tapiflex Excellence and Acczent Excellence are solid evidence of Tarkett's environmental actions.

- Tapiflex and Acczent Excellence are designed with strong environmental concern, from production to disposal.
- They offer eco-friendly properties, thanks to their easy and low cost maintenance and the reduced need for water, energy, and detergents.

+50% natural raw materials

+20 % recycled material

100 % recyclable

ISO 14001-certified manufacturing **plant**

Make your balanced choice

Tarkett's approach to sustainability is all about giving our customers simple and clear information so they can make the right choice of flooring, balancing their project and budget requirements beside the need for sustainable solutions.

Choose to use better materials – natural and renewable where possible

Select flooring produced with fewer resources

Ensure safer, healthier products that contribute to wellbeing in people-friendly spaces

Reuse and recycle materials through participating in recycling

Mint 25016 **003**

Pink 25016 **014**

HETEROGENEOUS
ACOUSTIC VINYL

Tapiflex Excellence 65 Uni

Specification

Printed acoustic vinyl floorcovering with high density foam backing on a glass fibre stabilized carrier, filler free wear layer.
PUR reinforcement, built in fungistatic and bacteriostatic Sanitized® treatment.
Product standard : EN 651.

CERTIFICATION & CLASSIFICATION	STANDARDS	Tapiflex Excellence 65 Uni
Type of floorcovering	EN 651 EN 649	Heterogeneous Acoustic Vinyl
CE certification	EN 14041	Yes
UPEC classification		U4P3E2/3C2*
Impact sound reduction	EN ISO 140-8 EN ISO 717-2	ΔL_W 19 dB
Acoustical improvement	NF S31-074	$L_{n,e,w}$ = 61 dB
NF UPEC. A+ certificate	NF 189	*Registration in progress ref n°10.4020/1 & 2 since 25/02/2011 (valid one year)
Classification	EN 685	34
TECHNICAL CHARACTERISTICS	**STANDARDS**	**Tapiflex Excellence 65 Uni**
Wear layer thickness	EN 429	0.65 mm
Surface treatment		TopClean XP
Total thickness	EN 428	3.45 mm
Abrasion group	EN 660-1	Group T : ≤ 0,08 mm
Total weight	EN 430	3 240 g/m²
Form of delivery	EN 426 Sheet (rolls)	approx. 23 running metres x 200 cm
	EN 427 Tiles (box)	
TECHNICAL PERFORMANCES	**STANDARDS**	**Tapiflex Excellence 65 Uni**
Dimensional stability	EN 434	< 0.10%
Reaction to fire	EN 13501-1	B_{fl} s1 on fibrecement substrate A2$_{fl}$ C_{fl} s1 on woodchip substrate
Static indentation	EN 433	0.12 mm
Castor chair	EN 425	No damage
Underfoot comfort	EN 433	≥ 0.40 mm
Furniture leg	EN 424	No damage
Curl resultant to heat	EN 434	≤ 8 mm
Electrostatic properties	EN 1815 EN 1081 EN 14041	< 2 kV R1 > 10^{10} Ω Antistatic on concrete
Fungi static and bacteria static effect	NF EN ISO 846	Sanitized®
Chemical resistance	EN 423	High resistance
Thermal resistance Underfloor heating	EN 12524	0,05 m² K/W Suitable
Light fastness	EN ISO 105-B02	≥ 6/8
Slip resistance	DIN 51130 EN 13893	R9 ≥ 0,3
Colours		100

The above information is subject to modification for the benefit of further improvement (05/11).

Tarkett's instructions regarding installation, cleaning and maintenance should be observed. Please contact Tarkett for these instructions.

Tarkett