


Tapiflex Excellence 65 Vario


ACOUSTIC HETEROGENEOUS VINYL



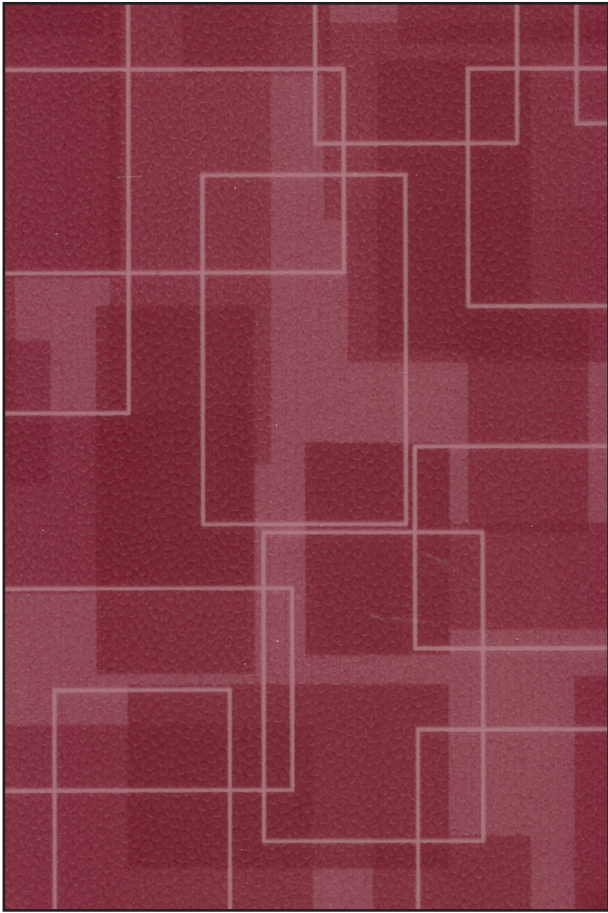

Red

25015 **002**

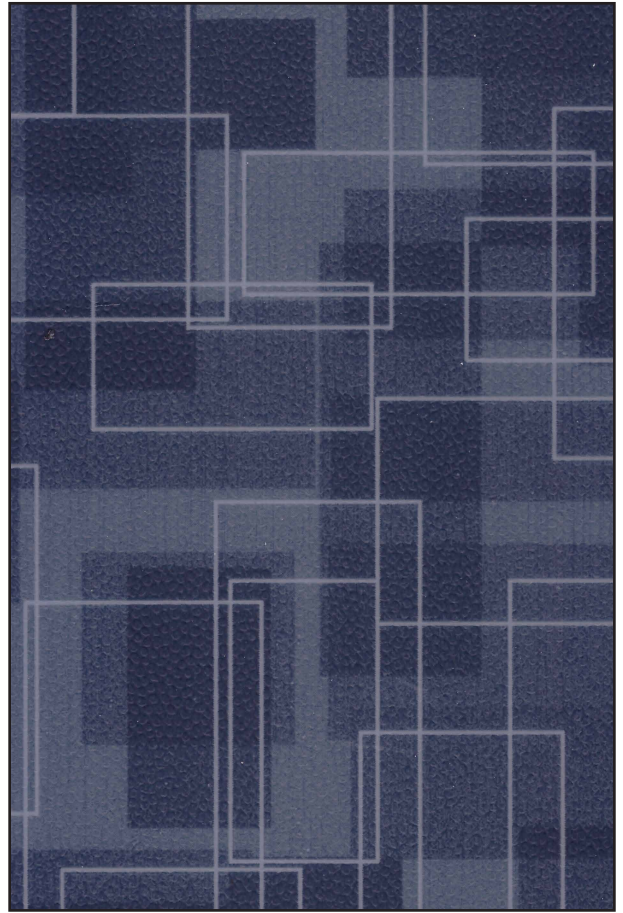


Blue

25015 **007**




Beige

25015 **004**

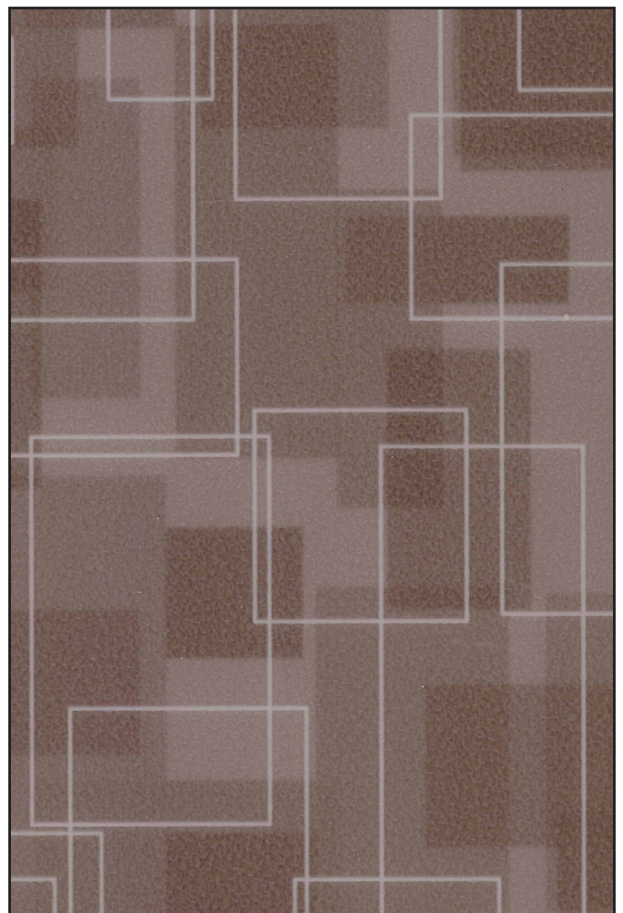


Light Brown

25015 **006**

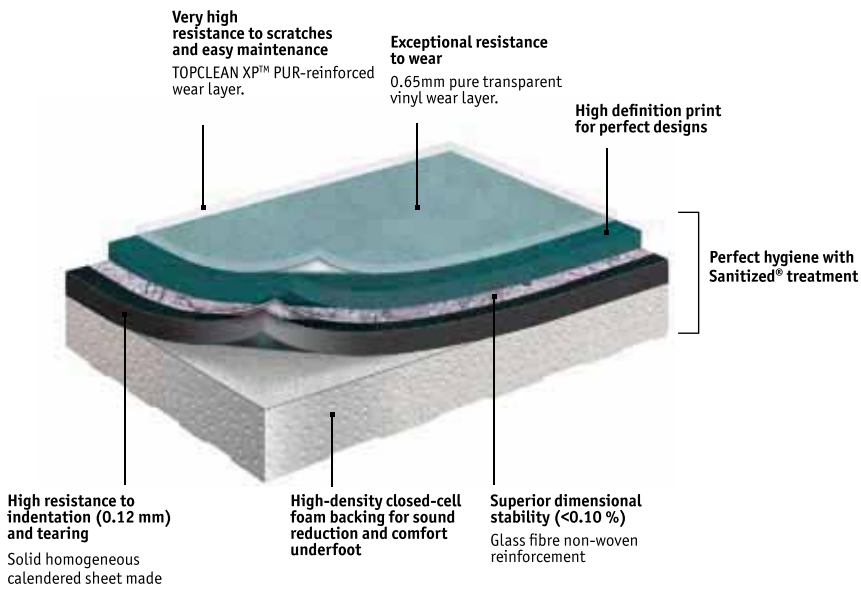


Make your balanced choice

Tarkett's approach to sustainability is all about giving our customers simple and clear information so they can make the right choice of flooring, balancing their project and budget requirements beside the need for sustainable solutions.

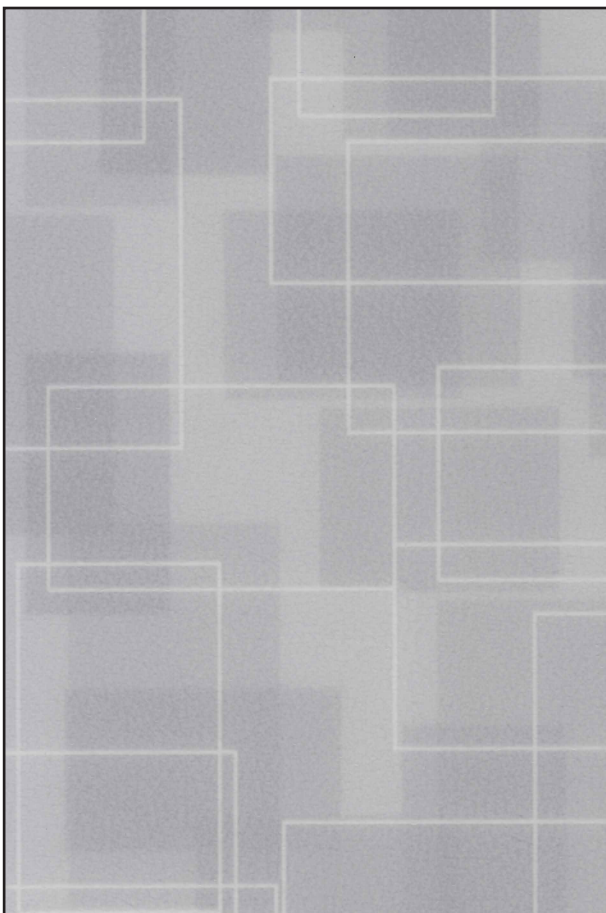

Light Cool Grey

25015 009

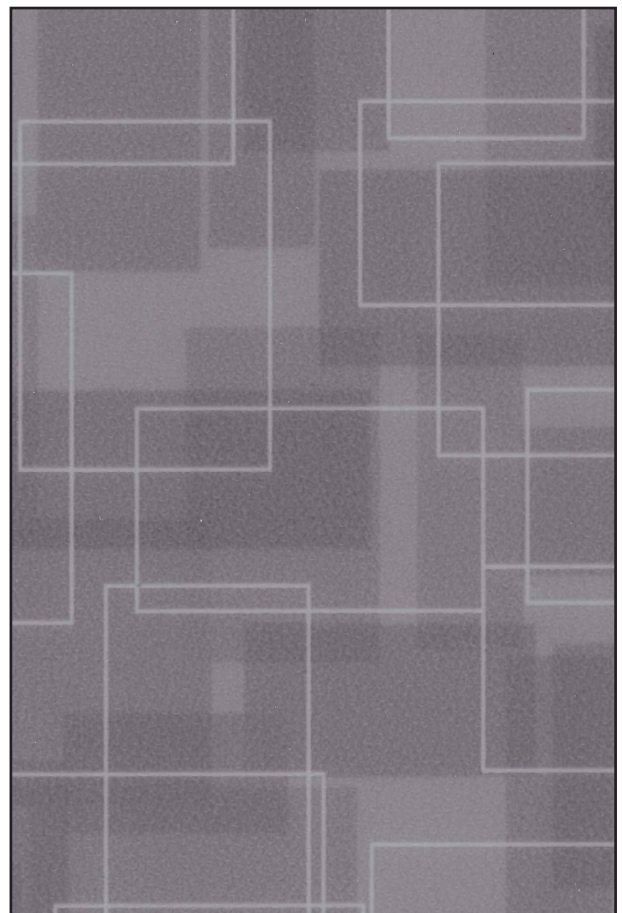

Cool Grey

25015 005

HETEROGENEOUS
ACOUSTIC VINYL

Tapiflex Excellence 65 Vario

Specification

Tapiflex Excellence 65

Printed vinyl floorcovering on glass fibre non woven PVC
foam backing Polyurethane reinforcement.
In sheet form.

CERTIFICATION & CLASSIFICATION	STANDARDS	Tapiflex Excellence 65 Vario
Classification	ISO 10874 - EN 685	Commercial very heavy: 34
Impact sound reduction	EN ISO 140-8 EN ISO 717-2	ΔL_w 19 dB
Acoustical Improvement	NF S31-074	$L_{n,e,w} < 65$ dB - Class A
TECHNICAL CHARACTERISTICS	STANDARDS	Tapiflex Excellence 65 Vario
Total thickness	ISO 24346 - EN 428	3.05mm
Wear layer thickness	EN 429	0.65mm
Total weight	ISO 23997 - EN 430	2850 g/m ²
Form of delivery	ISO 24341 - EN 426 Sheet (rolls)	Approx. 23 r m x 200 cm also available in 30, 40 and 50 r m
TECHNICAL PERFORMANCES	STANDARDS	Tapiflex Excellence 65 Vario
Dimensional stability	ISO 23999 - EN 434	$\leq 0,10\%$
Reaction to fire	EN 13501-1	$B_{fl} \leq 1$ on fibrecement substrate $A2_{fl}$ $C_{fl} \leq 1$ on woodchip substrate ≥ 19 mm
Curl resultant to heat	ISO 23999 - EN 434	≤ 8 mm
Abrasion Volume loss	EN 660: Part 2	Group T: ≤ 2.0 mm ³
Residual indentation	ISO 24343-1 - EN 433	Required value: ≤ 0.20 mm Average measured value: 0.10mm
Furniture leg	EN 424	No damage
Castor wheel test	ISO 4918 - EN 425	No damage
Electrostatic properties	EN 1815 EN 1081	≤ 2 kV on concrete $R1 > 10^9 \Omega$
Total VOC emissions	AgBB/DIBt	$\leq 10 \mu\text{g}/\text{m}^3$ (after 28 days)
Thermal resistance	EN 12667	$0.04 \text{ m}^2 \text{ K}/\text{W}$
Underfloor heating		Suitable
Light fastness	EN ISO 105-B02	≥ 6
Chemical resistance	EN 423	High resistance
Hygiene	-	Does not contribute to infection spreading
Slip resistance	DIN 51130 EN 13893	R9 $\mu \geq 0.3$
Colours		10

The above information is subject to modification for the benefit of further improvement. (02/14).
Tarkett's instructions regarding installation, cleaning and maintenance should be observed.

