

PREMIUM
VINYL

TARKETT TOUCH

Yes, it really looks and feels that natural.



CRAFTED OAK
LIVING OAK



PREMIUM
VINYL

TARKETT TOUCH



Living Oak / Beige - 230585027



Living Oak / Light Grey - 230585025




Living Oak / Light Natural - 230585023



Living Oak / Grey - 230585021



Living Oak / Brown - 230585019

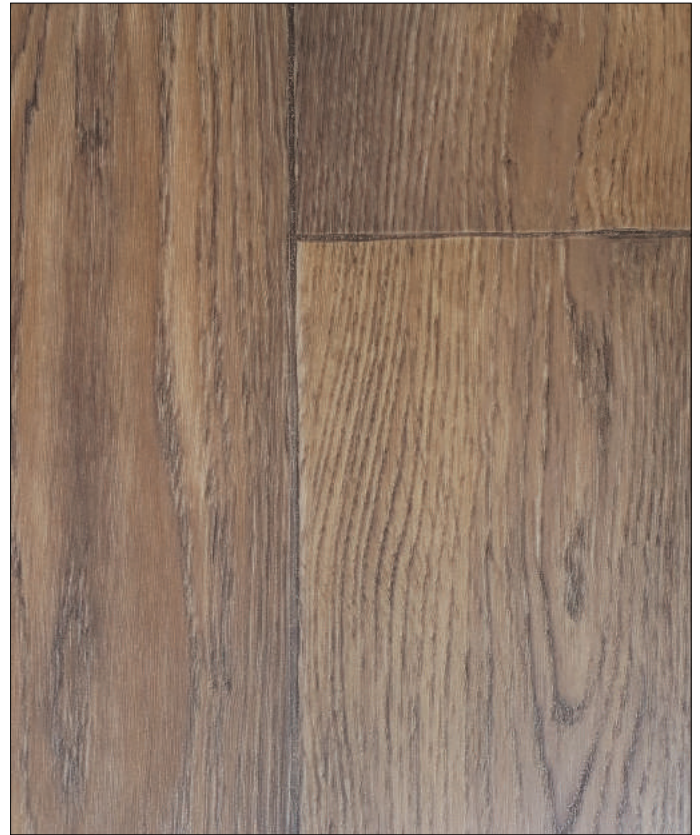

Living Oak / Natural - 230585017



Living Oak / Light Beige - 230585015



Crafted Oak / Light Natural - 230585013



BRING NATURE INSIDE: IT LOOKS AND FEELS THAT NATURAL

Touch is environmentally friendly.

Phthalate-free and with low VOC emissions (10 times lower than European standards), Touch is very easy to dust and clean making it a solution that's also asthma and allergy-friendly.

Touch is warm and comfortable

Touch provides soft underfoot comfort and thermal properties known to vinyl flooring.

Touch is elegant

Touch borrows the majesty of wood to confer a natural elegance to your interior.

Touch is strong

Touch has a reinforced surface protection preserving the beauty of your floor for a long time.

Touch is easy

Unroll, it's done.

PREMIUM
VINYL

TARKETT TOUCH



Crafted Oak / Grey - 230585011



Crafted Oak / Beige - 230585009



Crafted Oak / Brown - 230585007




Crafted Oak / Warm Beige - 230585005

PREMIUM
VINYL

TARKETT TOUCH



Crafted Oak / Natural - 230585003

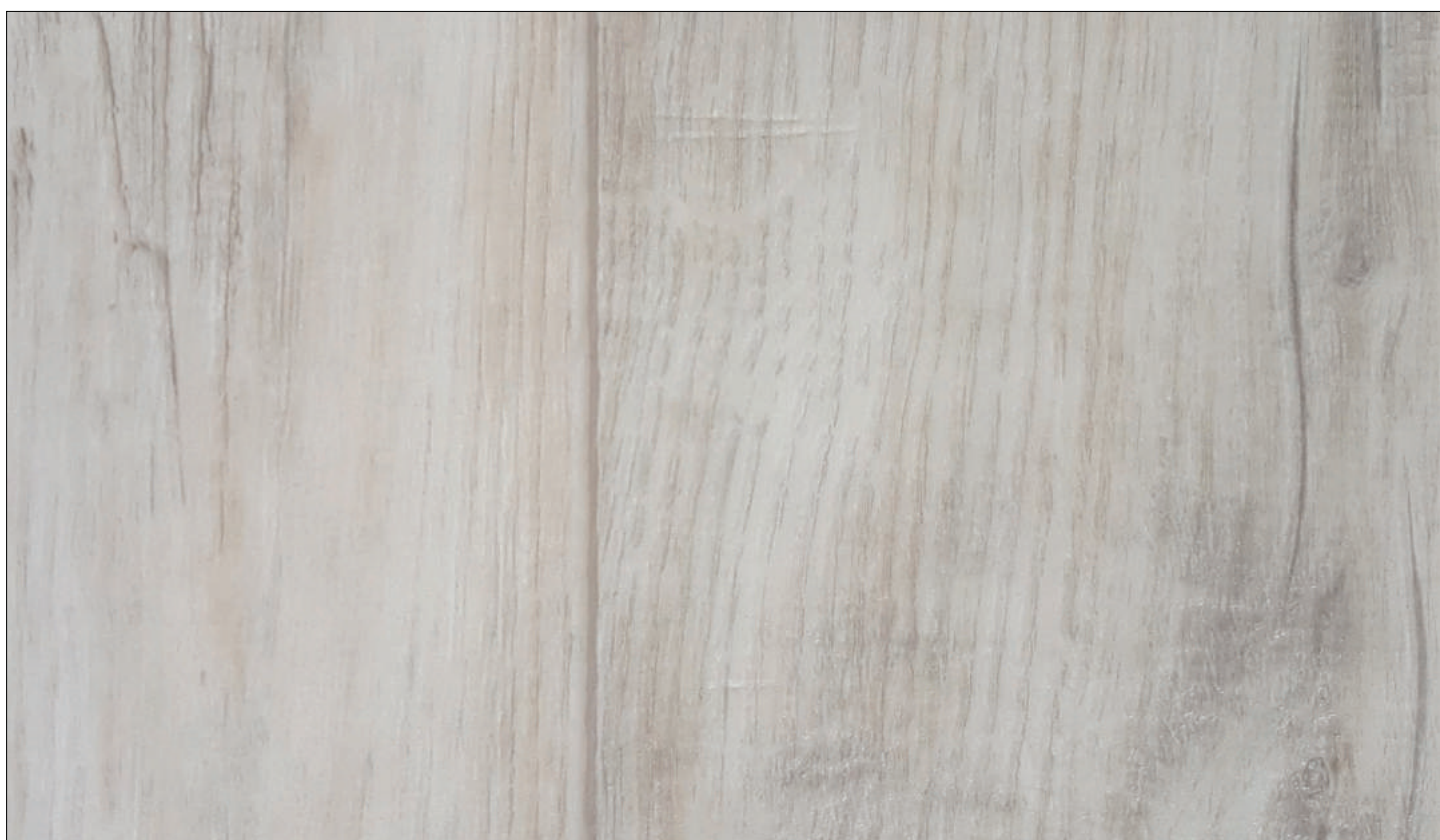

Crafted Oak / Light Beige - 230585000

PREMIUM
VINYL

TARKETT TOUCH



Vinyl floor Covering	EN ISO 26986
Classes of Use	EN ISO 10874 23  32 


PRODUCT ID

 Total Thickness	EN ISO 24346	2.50 mm	 Impact Sound Absorption	EN ISO 717-2	22 dB
 Wear Layer Thickness	EN ISO 24340	0.50 mm	 Residual Indentation	EN ISO 24343-1	≤ 0.20 mm
 Weight	EN ISO 23997	2.500 kg/m ²	 Castor Chair	ISO 4918	OK
 Roll Width	EN ISO 24341	4 m	Wear Layer Binder content	ISO 11638	Type I
 Roll Length		ca. 25m			

PRODUCT SAFETY & SECURITY CHARACTERISTICS

 Slip Resistance	EN 13893 DIN 51130	$\mu \geq 0.30$ R9	 Fire Classification	EN 13501-1	Cfl-s1 (glued on woodenpanel)
 Static Electrical Propensity	EN 1815	≤ 2.kV	 Fire Classification		Bfl-s1 (glued on cement)

PRODUCT ENVIRONMENTAL BEHAVIOR

 Dimensional Stability	EN ISO 23999	≤ 0.10 %	 PHTHALATE FREE Technology *Except recycled content	 <100 µg/m ³ * Better Indoor Air Quality *TVOC AT 28 DAYS	 100 % Recyclable
 Thermal resistance for underfloor heating	ISO 10456 EN 12524-1	0.02 m ² /kW			
 Light Fastness	EN ISO 105 B02	≥ 6			

