



MODERN, CLASSICAL & STYLISH  
FLOOR, WALL & WINDOW TREATMENTS.




## INTERFLOOR

Interfloor is Europe's largest manufacturer of carpet underlay, hard flooring underlay and flooring accessories. Interfloor manufactures a diverse range of products including the three most popular form of underlay – polyurethane foam, sponge rubber and crumb rubber. Interfloor brands include Duralay, Tredaire, Gripperrods & Stikatak.

**interfloor**

**Duralay** **tredaire** **Gripperrods**® **STIKATAK**®


# Durafit 500

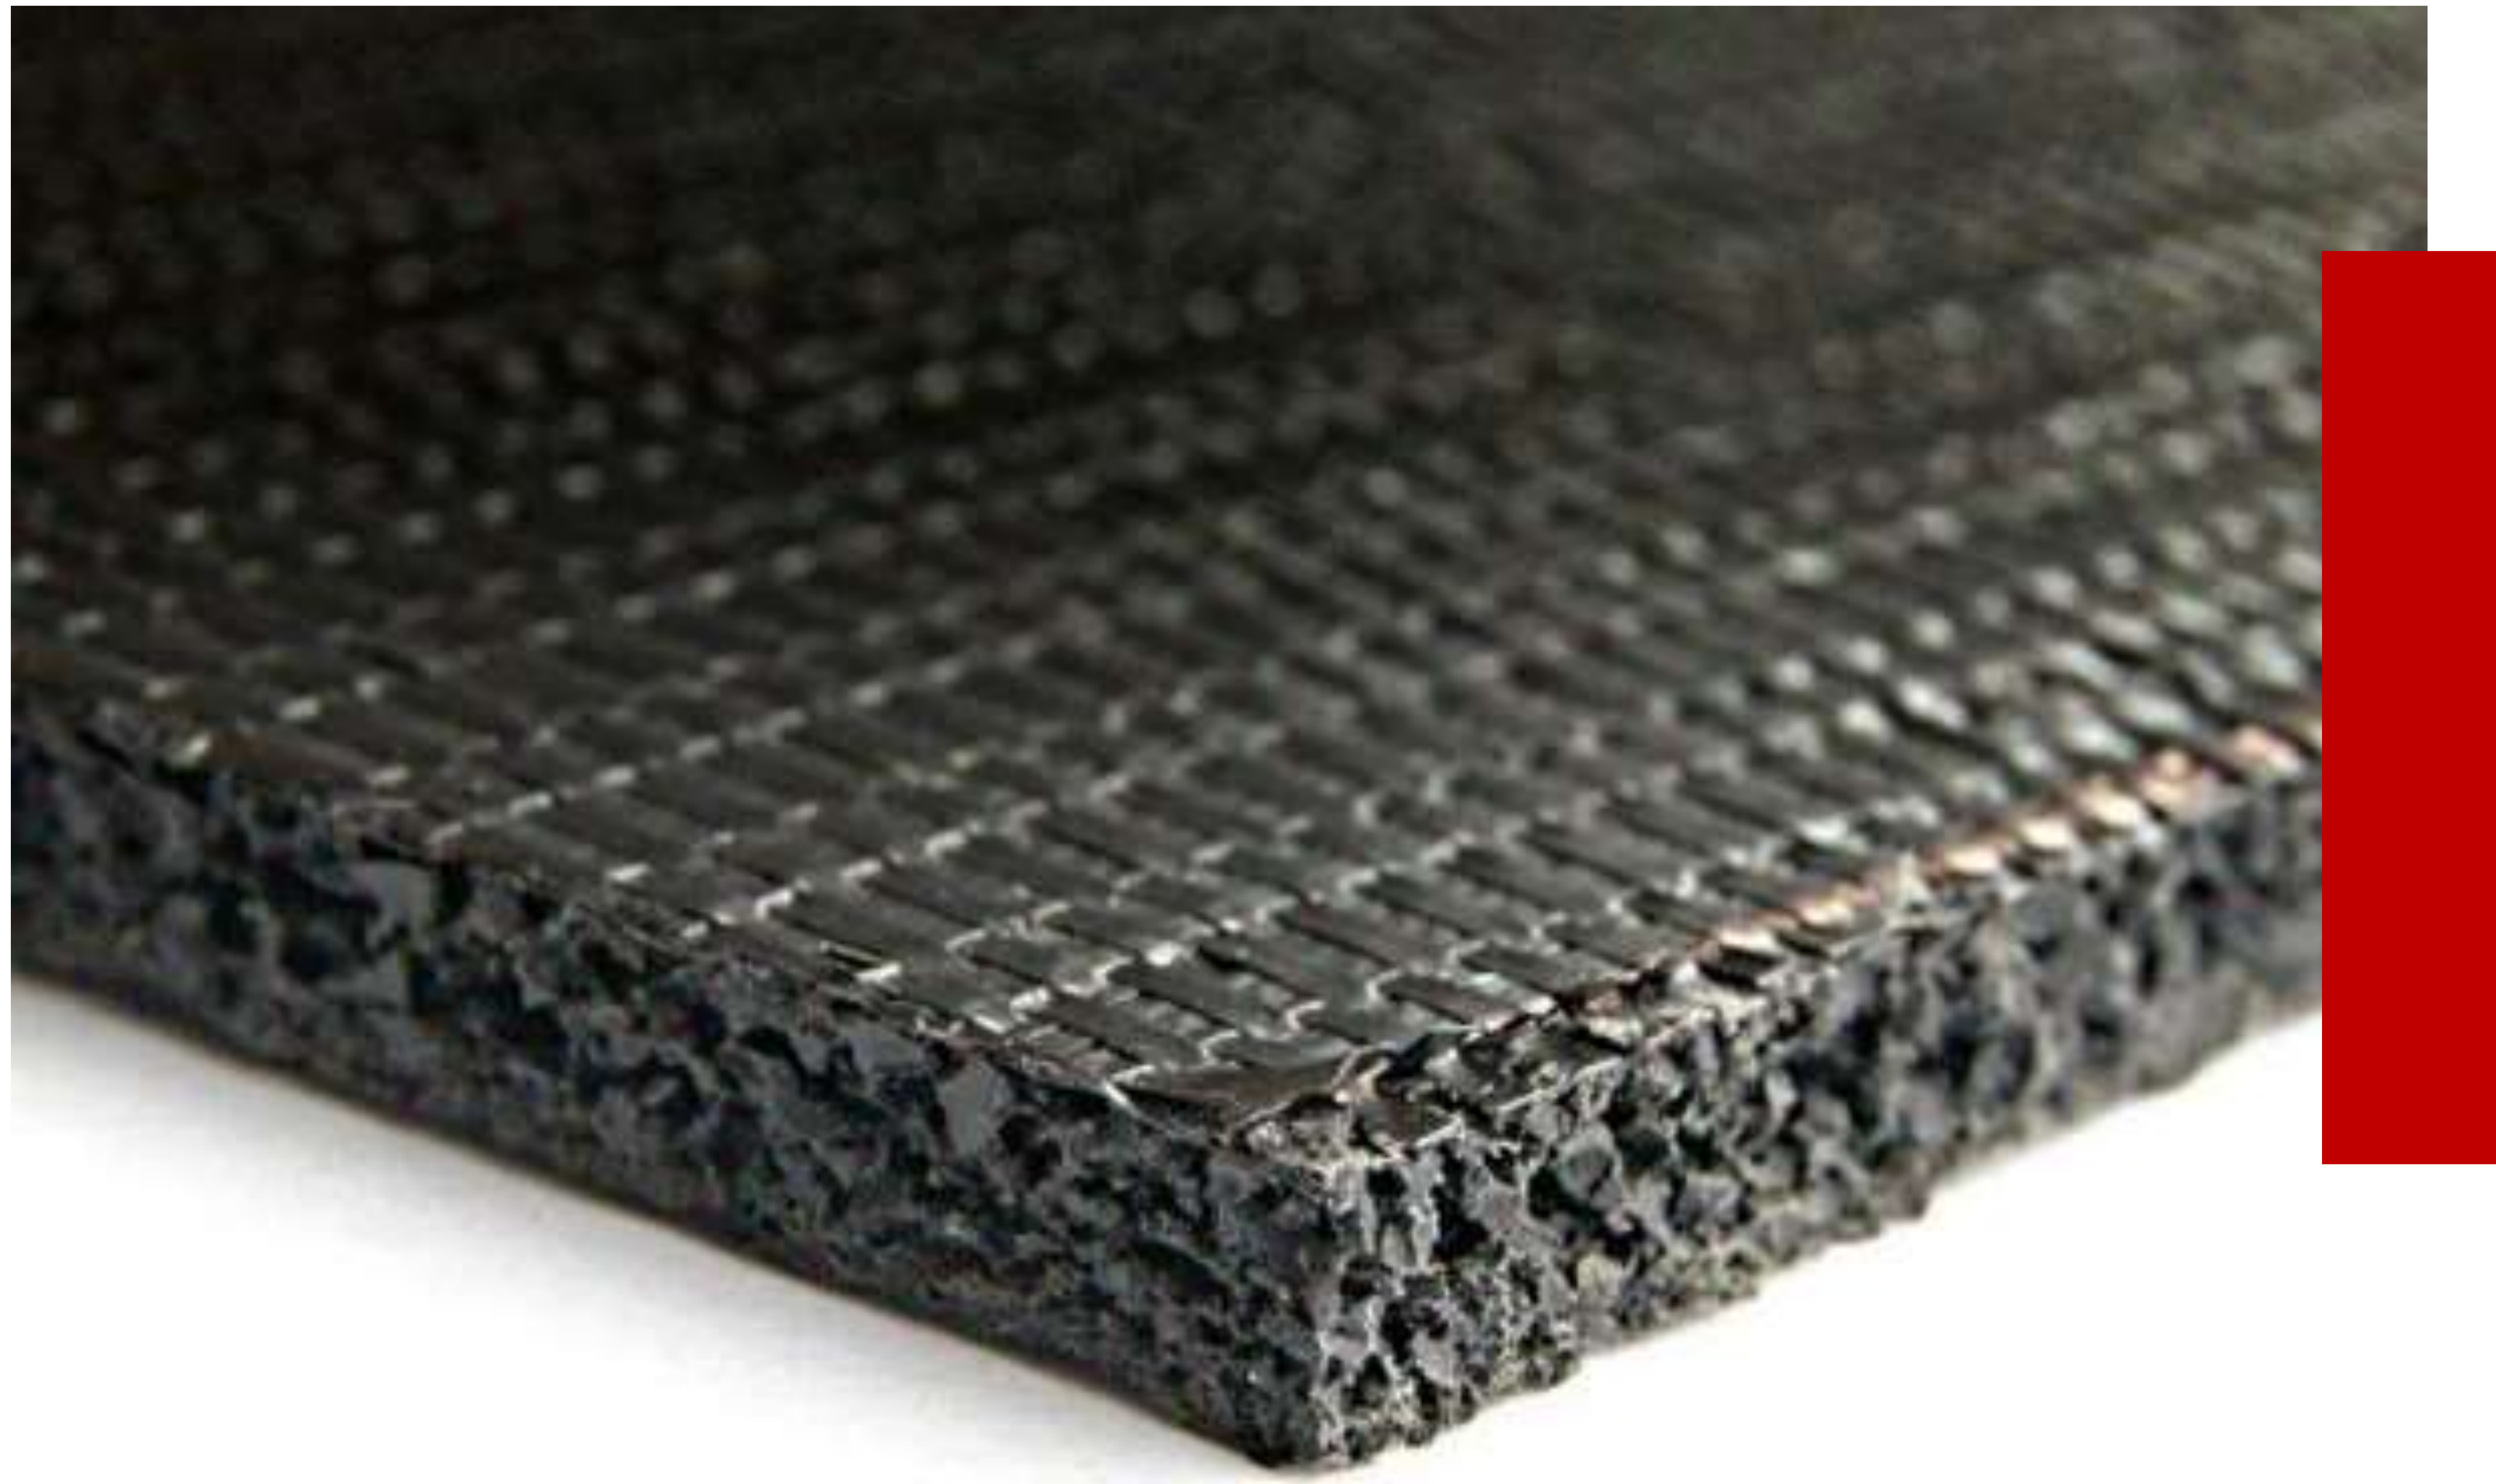

## Specifications

Floor Usage:	Carpet
Installation Method:	Double-Stick
Construction:	Crumb Rubber (Reinforced)
Thickness:	5.25mm
Square Weight:	2100 g/m <sup>2</sup>
Roll Area:	15.07m <sup>2</sup>
End Use Classification	HC/U Heavy Contract
Odour:	No Objectionable Odour
French VOC Emission Regs:	A+
Anti-Microbial & Mildew:	Pass
Impact Sound Reduction:	26 dB
Recyclable:	100%
Indoor Air Quality:	Green Label Plus Certified

# Durafit 650

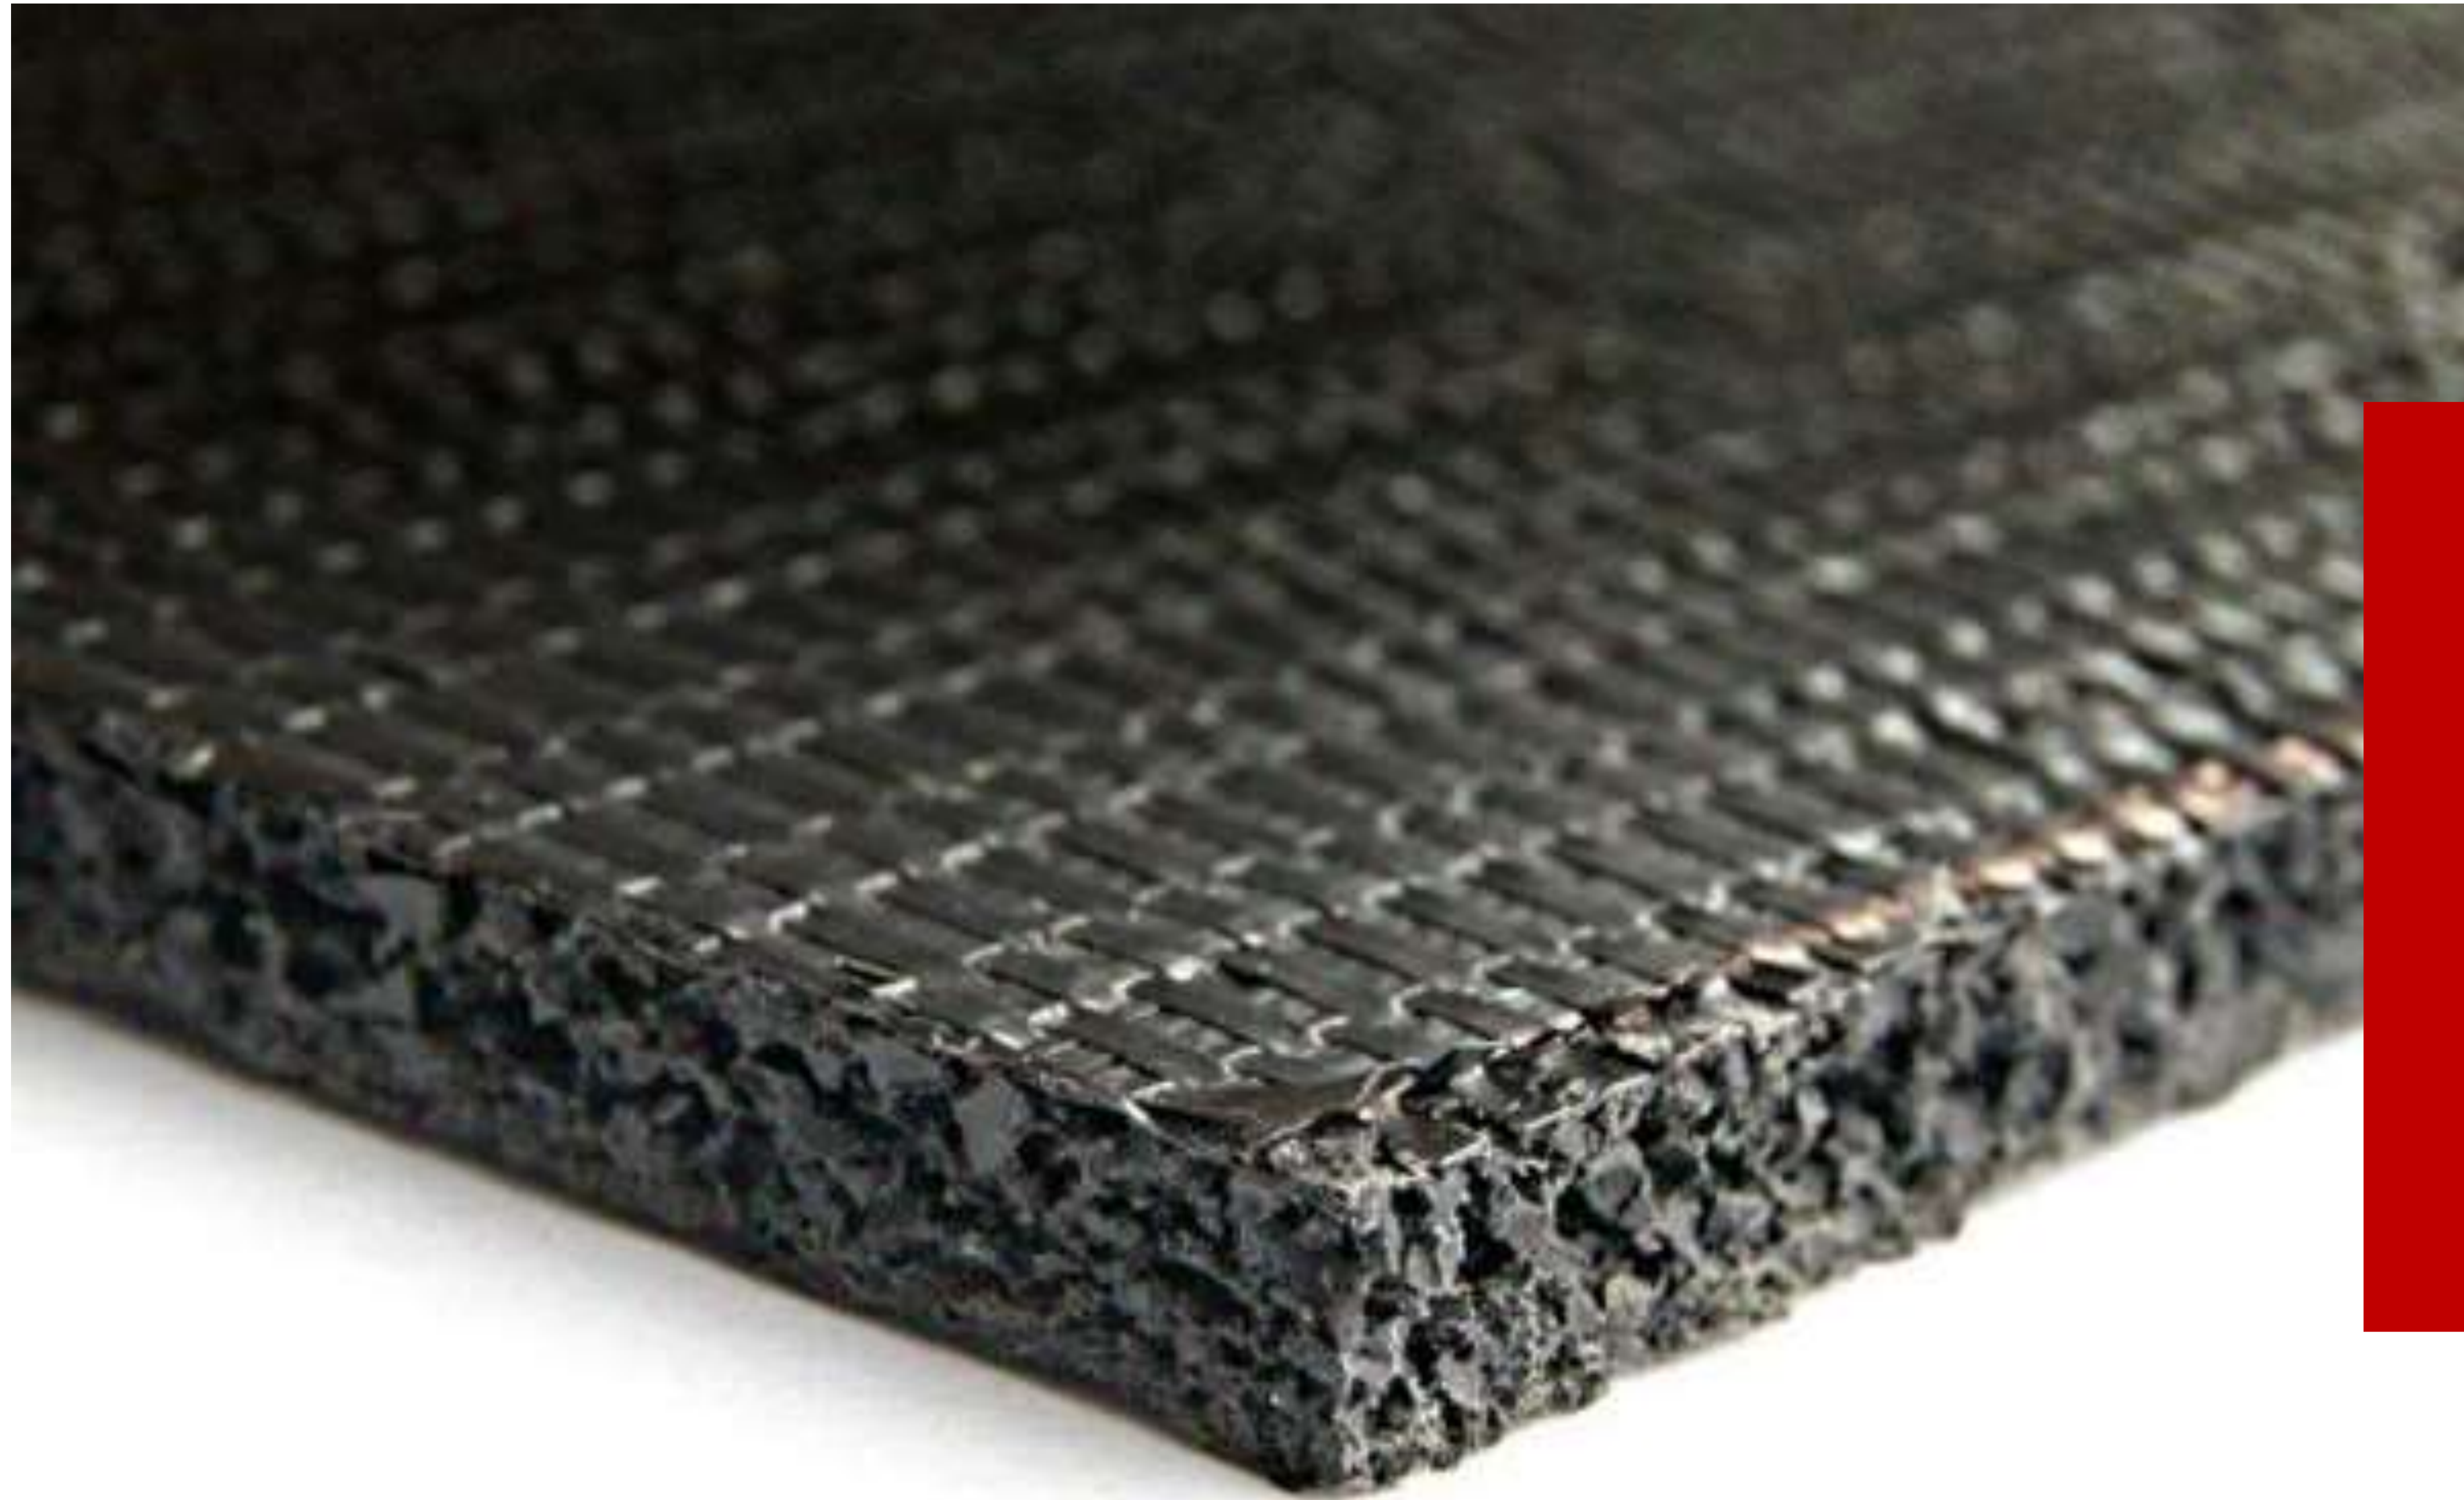

## Specifications

Floor Usage:	Carpet
Installation Method:	Double-Stick
Construction:	Crumb Rubber (Reinforced)
Thickness:	6.5 mm
Square Weight:	2700 g/m <sup>2</sup>
Roll Area:	15.07m <sup>2</sup>
End Use Classification	HC/U Heavy Contract
Odour:	No Objectionable Odour
French VOC Emission Regs:	A+
Anti-Microbial & Mildew:	Pass
Impact Sound Reduction:	29 dB
Recyclable:	100%
Indoor Air Quality:	Green Label Plus Certified

# Dynamics



## Specifications

Floor Usage:	Carpet
Installation Method:	Stretch Fit
Construction:	Sponge Rubber
Thickness:	9.4 mm
Square Weight:	3458 g/m <sup>2</sup>
Roll Area:	10.96 m <sup>2</sup>
End Use Classification	L/U Luxury & Contract
Odour:	No Objectionable Odour
French VOC Emission Regs:	A+
Anti-Microbial & Mildew:	Pass
Impact Sound Reduction:	35 dB
Recyclable:	100%
Indoor Air Quality:	Green Label Plus Certified

# Step 100



## Specifications

Floor Usage:	Carpet
Installation Method:	Stretch Fit
Construction:	Sponge Rubber
Thickness:	8.9 mm
Square Weight:	3017 g/m <sup>2</sup>
Roll Area:	15.07 m <sup>2</sup>
End Use Classification	GD/U General Use & Contract
Odour:	No Objectionable Odour
French VOC Emission Regs:	A+
Anti-Microbial & Mildew:	Pass
Impact Sound Reduction:	35 dB
Recyclable:	100%
Indoor Air Quality:	Green Label Plus Certified

# Timbermate Excel



## Specifications

Floor Usage:	Timber & Laminate
Installation Method:	Loose Lay
Construction:	Laminate Sponge Rubber
Thickness:	3.6 mm
Square Weight:	3545 g/m <sup>2</sup>
Roll Area:	15.07 m <sup>2</sup>
End Use Classification	HC/U Heavy Contract Use
Odour:	No Objectionable Odour
French VOC Emission Regs:	A+
Anti-Microbial & Mildew:	Pass
Impact Sound Reduction:	23 dB
Recyclable:	100%
Emissions:	Meets or Exceeds / CRI Green Label

# LVT Multi-Fit



## Specifications

Floor Usage:	LVT
Installation Method:	Loose Lay
Construction:	Sponge Rubber
Thickness:	1.5 mm
Square Weight:	2500 g/m <sup>2</sup>
Roll Area:	10.00 m <sup>2</sup>
End Use Classification	GD/U General Use & Contract
Odour:	No Objectionable Odour
French VOC Emission Regs:	A+
Anti-Microbial & Mildew:	Pass
Impact Sound Reduction:	18 dB
Recyclable:	100%
Indoor Air Quality:	Green Label Plus Certified