


PREMIUM FLOOR COVERING SYSTEMS



PROFESSIONAL & GENERAL FLOORING

PRODUCT PORTFOLIO

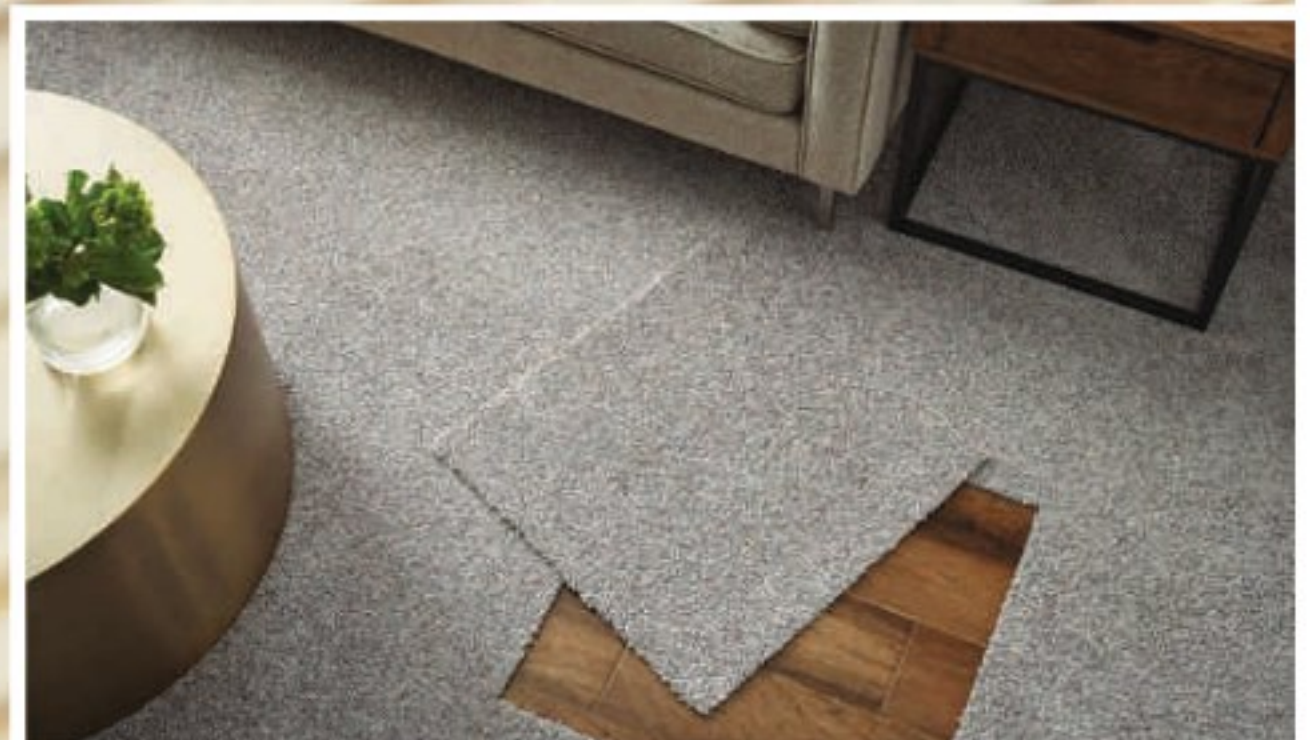


INDEX

- Page 04 Carpet Tile Installation System
- Page 05 Luxury Vinyl Tiles (LVT) System
- Page 06 Vinyl Sheet, PVC & Rubber Sports Flooring System
- Page 07 Double Stick Carpet Flooring System
- Page 08 Conductive Vinyl Sheets/ Tiles System
- Page 09 Pre-Finished Parquet Installation System
- Page 10 Raised Access Flooring System
- Page 11 Advantages and Global Presence
- Page 12-15 Product Details (Professional Flooring)
- Page 16-18 Product Details (General Flooring)

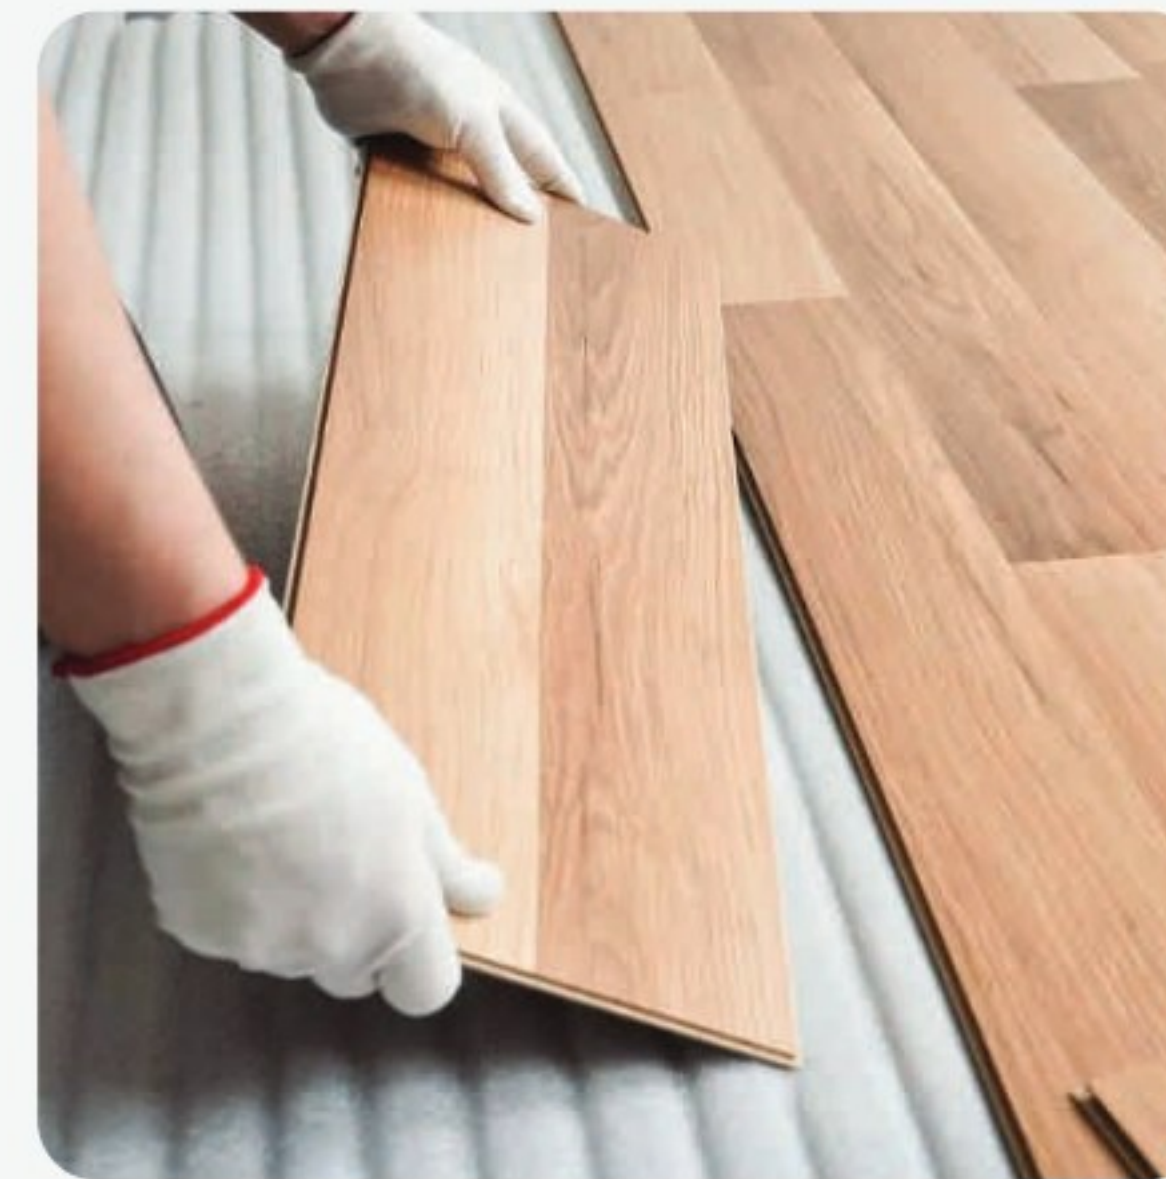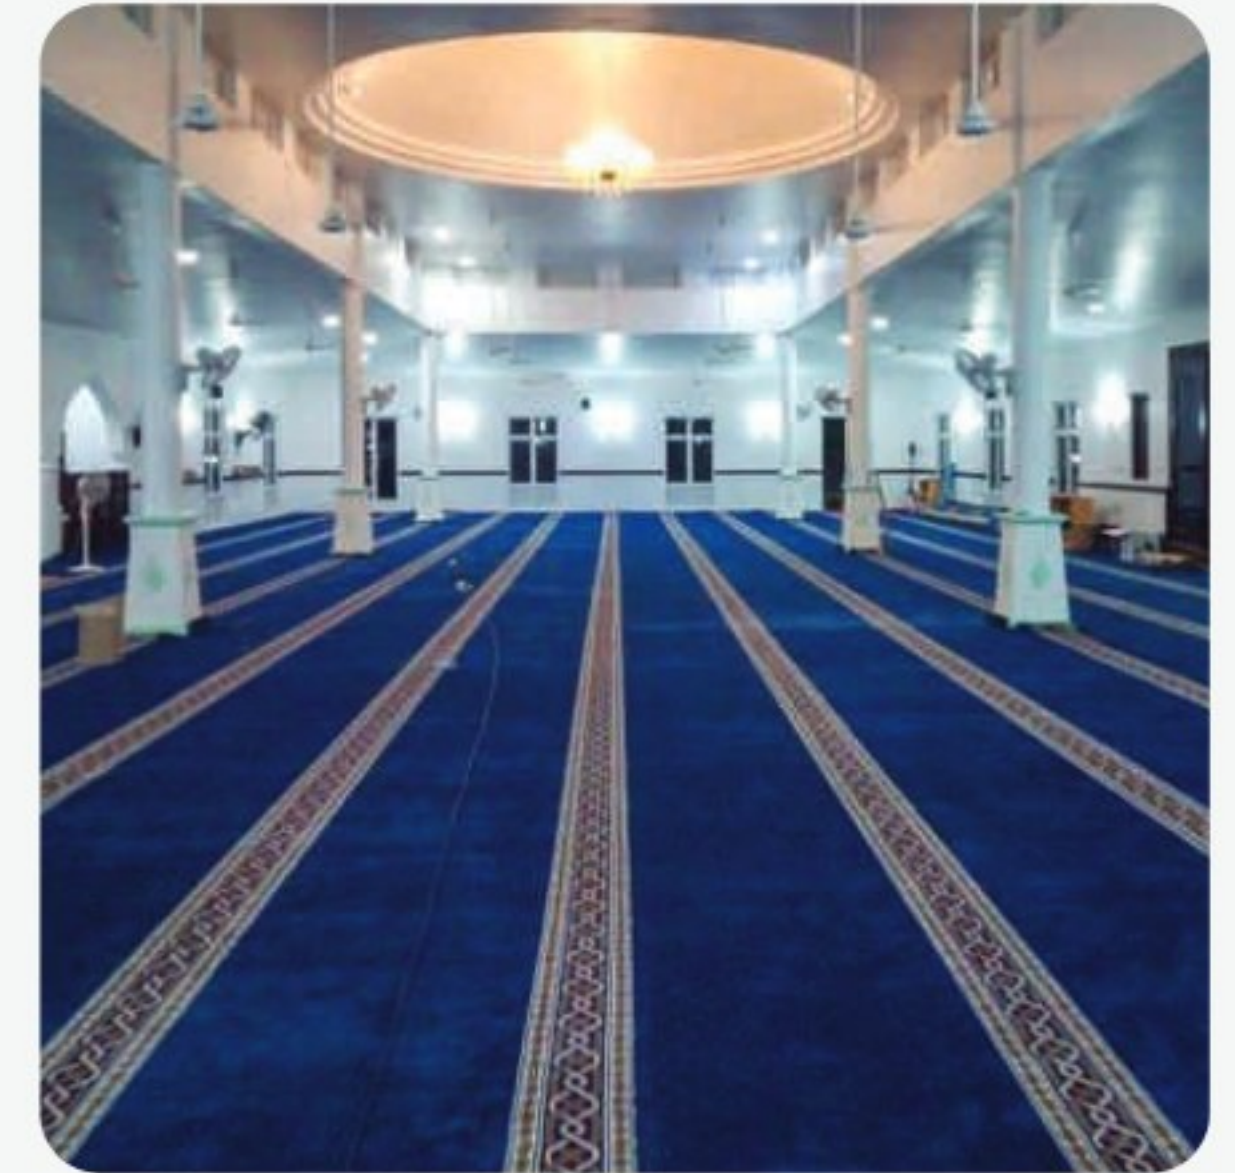

FLOORING SYSTEMS PORTFOLIO

CARPET TILE INSTALLATION
SYSTEM

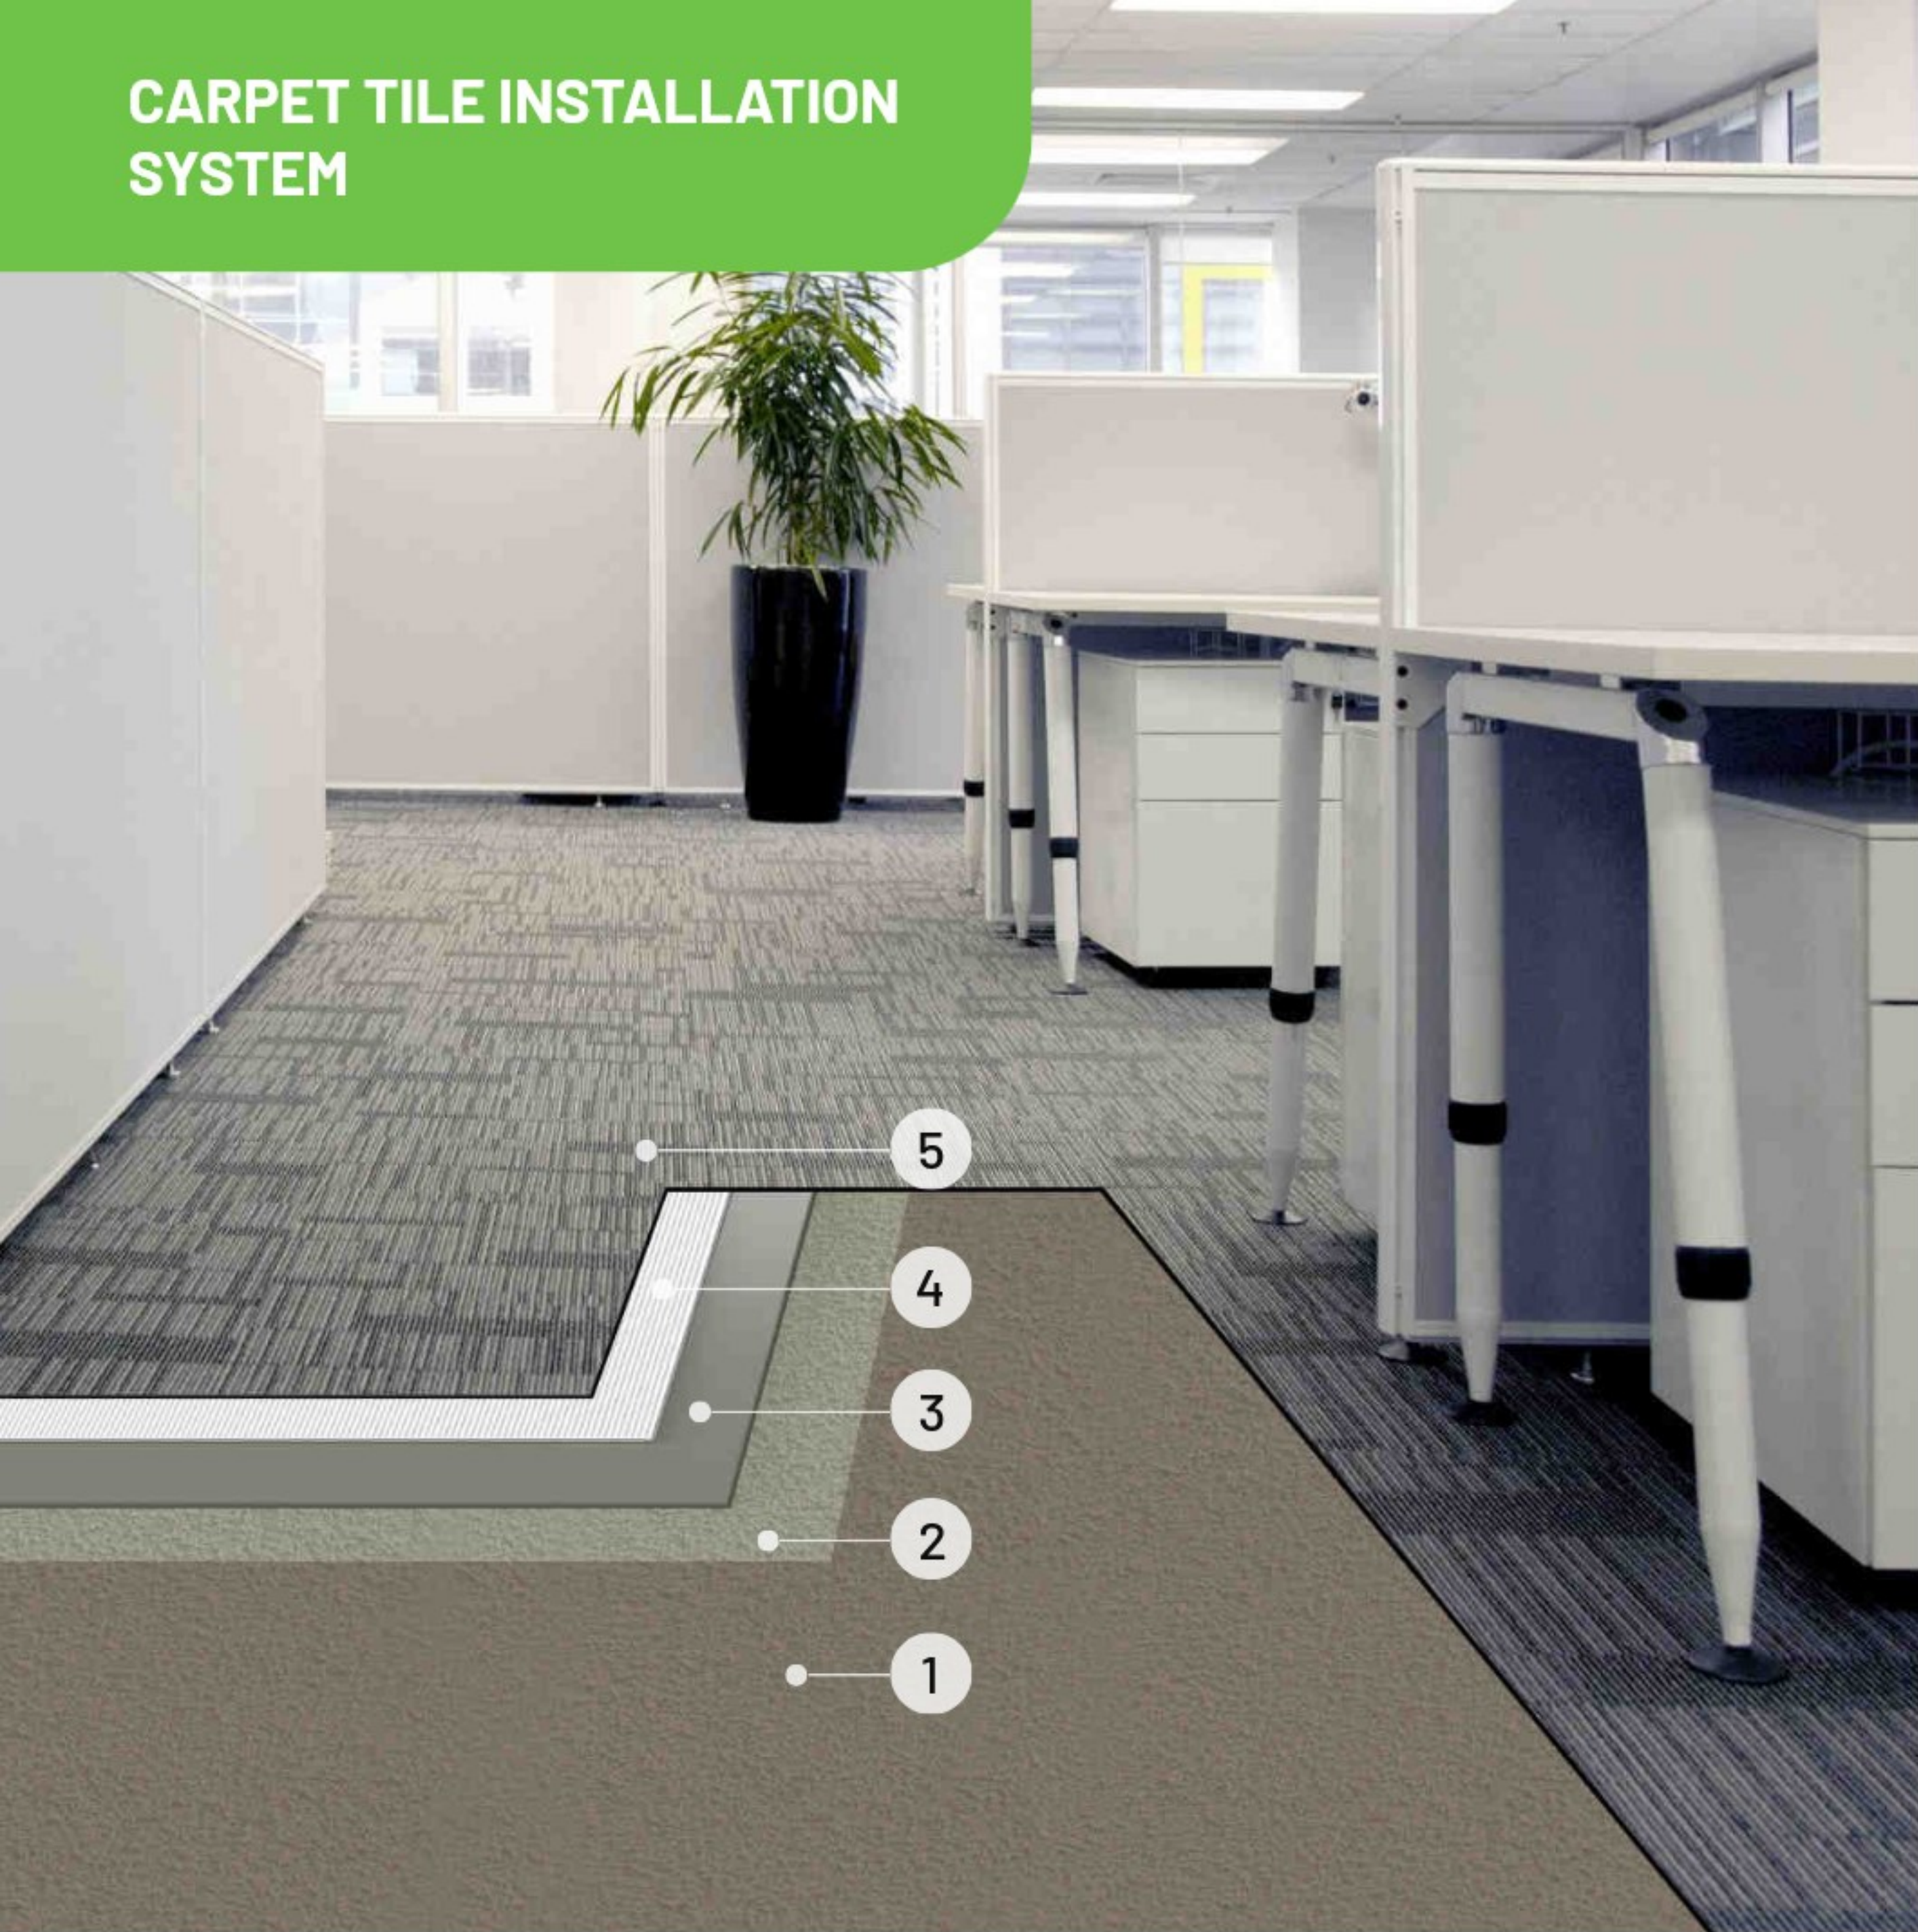

LUXURY VINYL TILES (LVT)
SYSTEM



- 1

BASE: Properly prepared flooring substrate
- 2

 Primer
V BOND P120
- 3

 Levelling compound
V BOND SL40
- 4

 Adhesive
V BOND CT 400 | ENIFIX CT
- 5

Carpet Tiles

- 1

BASE: Properly prepared flooring substrate
- 2


 Primer
V BOND P120
- 3

 Levelling compound
V BOND SL40
- 4

 Adhesive
V BOND 400 | ENIFIX VA
- 5

Luxury Vinyl Tiles (LVT)

VINYL SHEET, PVC & RUBBER SPORTS FLOORING SYSTEM

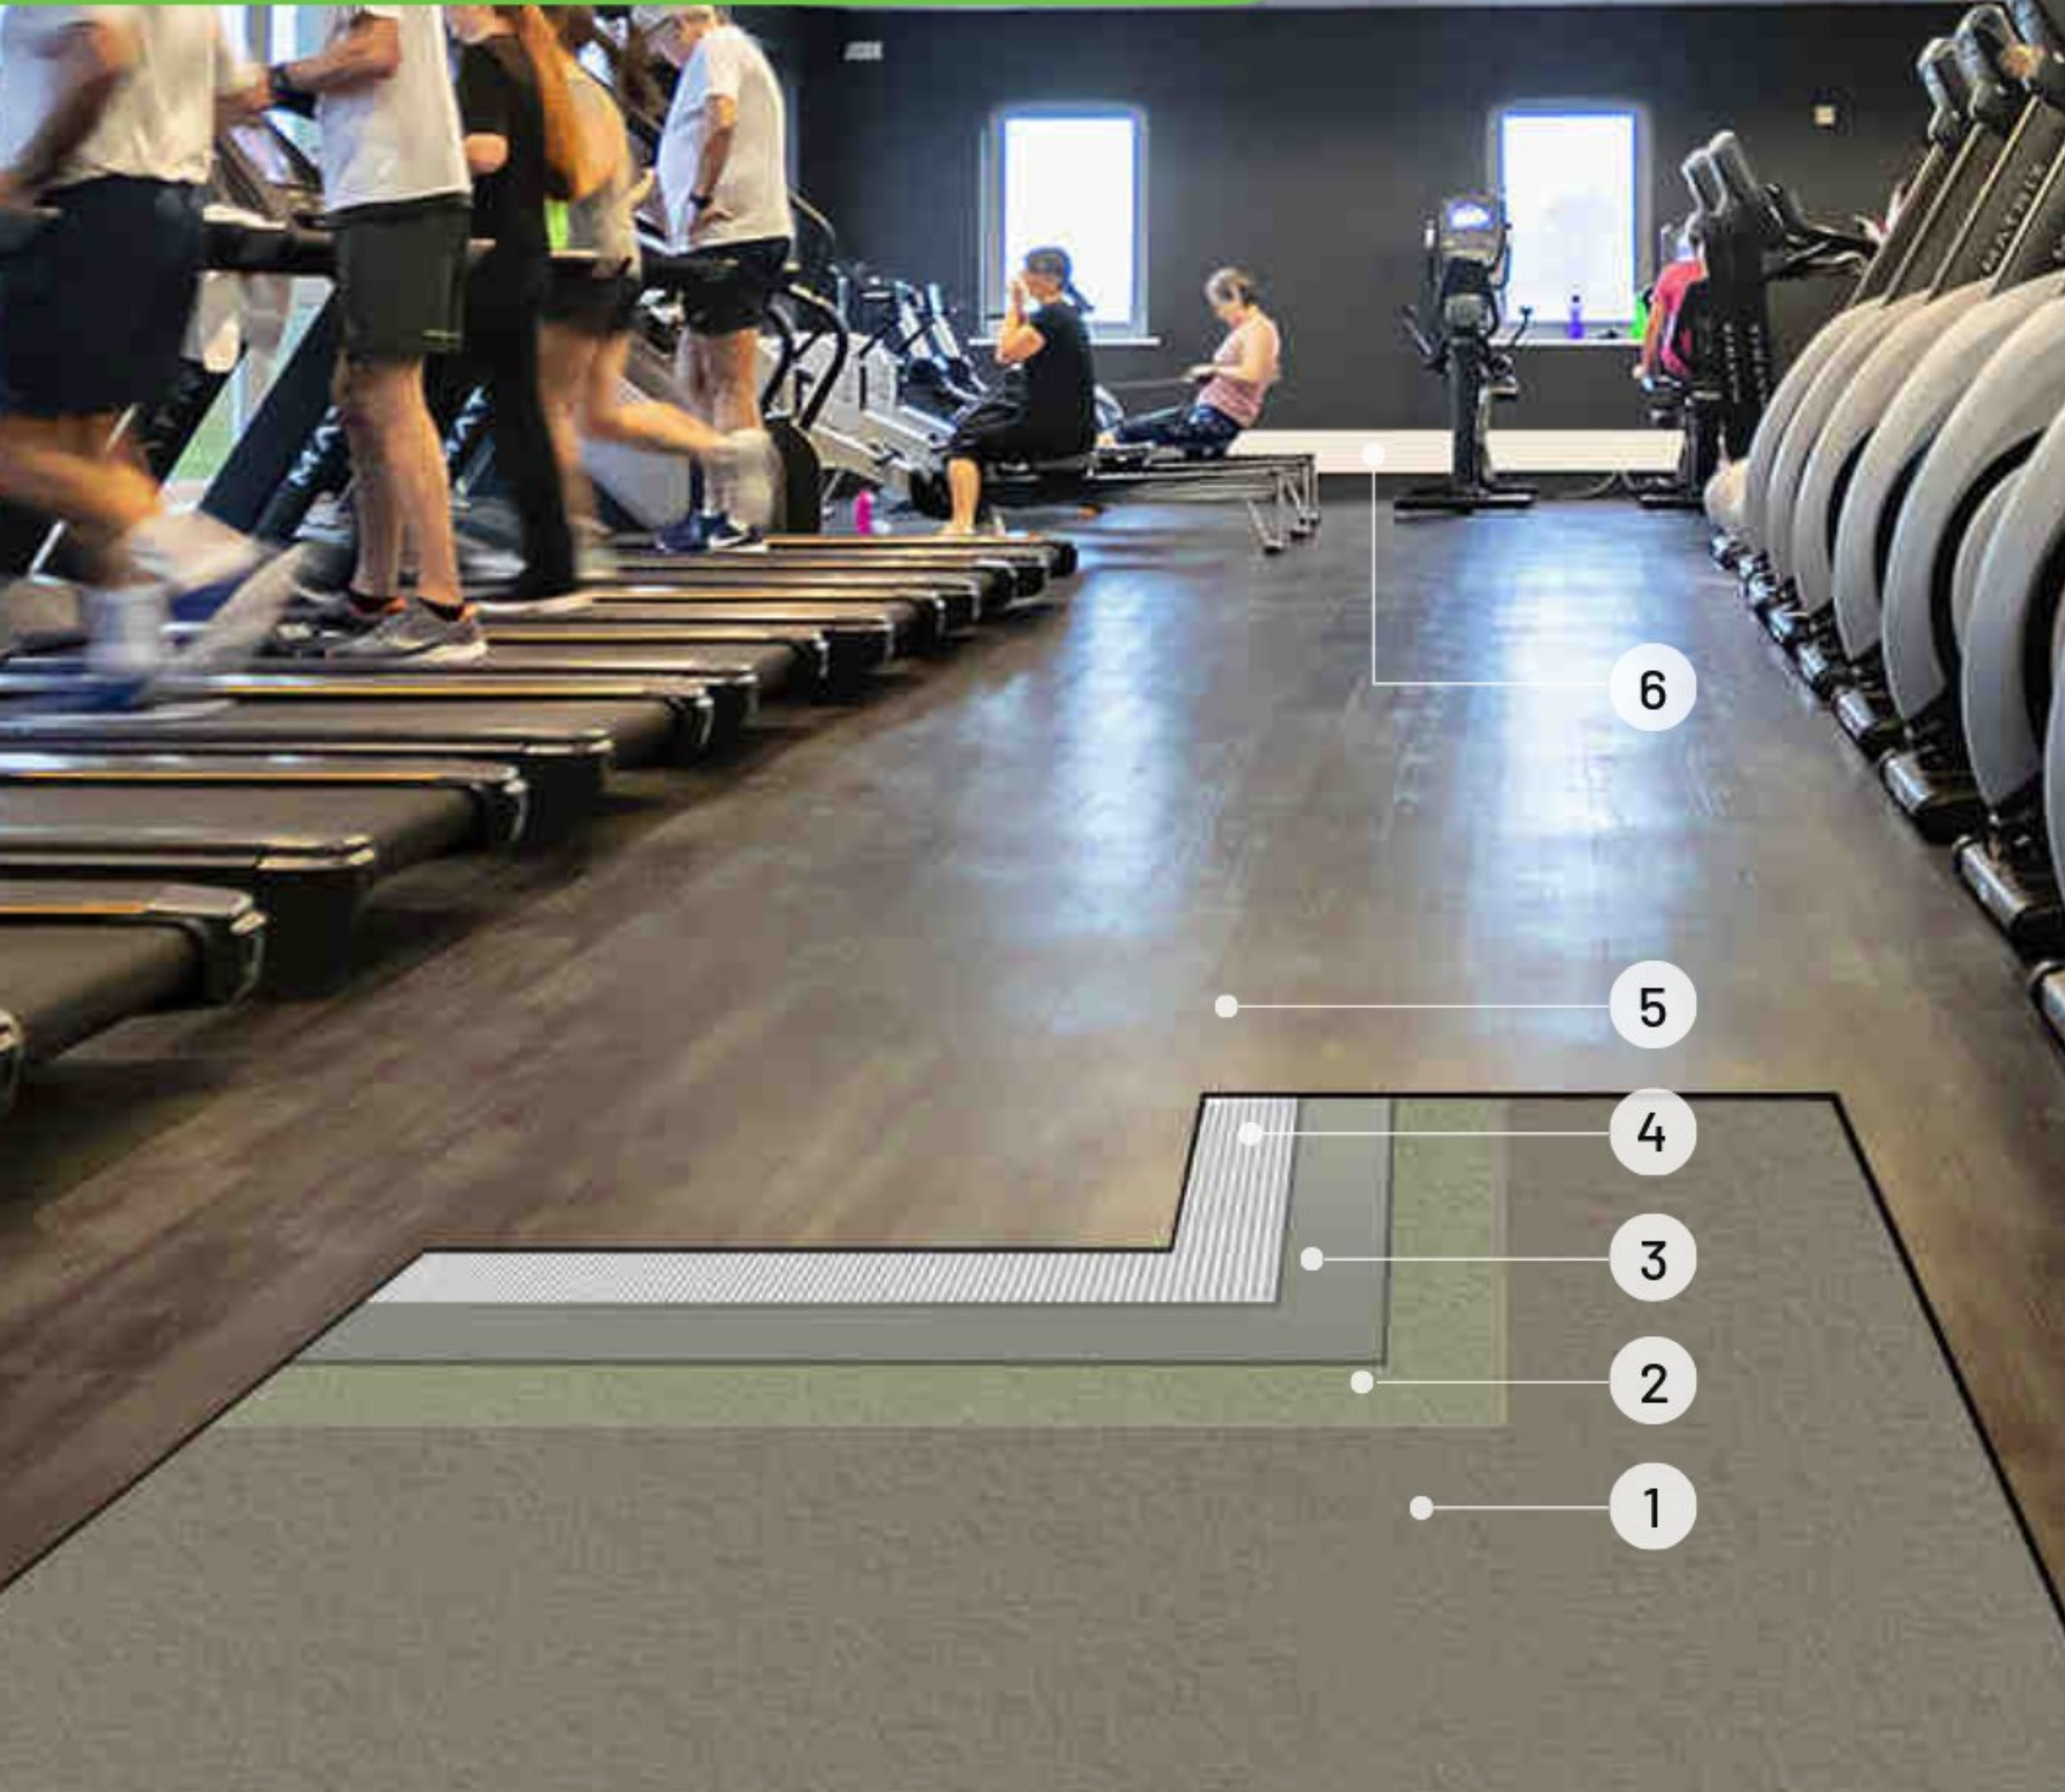


DOUBE STICK CARPET FLOORING SYSTEM



1	BASE: Properly prepared concrete substrate	4	Adhesive V BOND 400 ENIFIX VA
2	Primer V BOND P120	5	Resilient Floor Covering
3	Levelling compound V BOND SL40	6	Contact Adhesive for Wall Skirting: ENIFIX 350

1	BASE: Properly prepared concrete substrate	4	Adhesive V BOND 400 ENIFIX CA
2	Adhesive V BOND CT 400 ENIFIX CT	5	Carpet
3	Dual Bond Underlay	6	Contact Adhesive for Carpet Corners Fixing: ENIFIX CA 303

CONDUCTIVE VINYL SHEETS/TILES SYSTEM

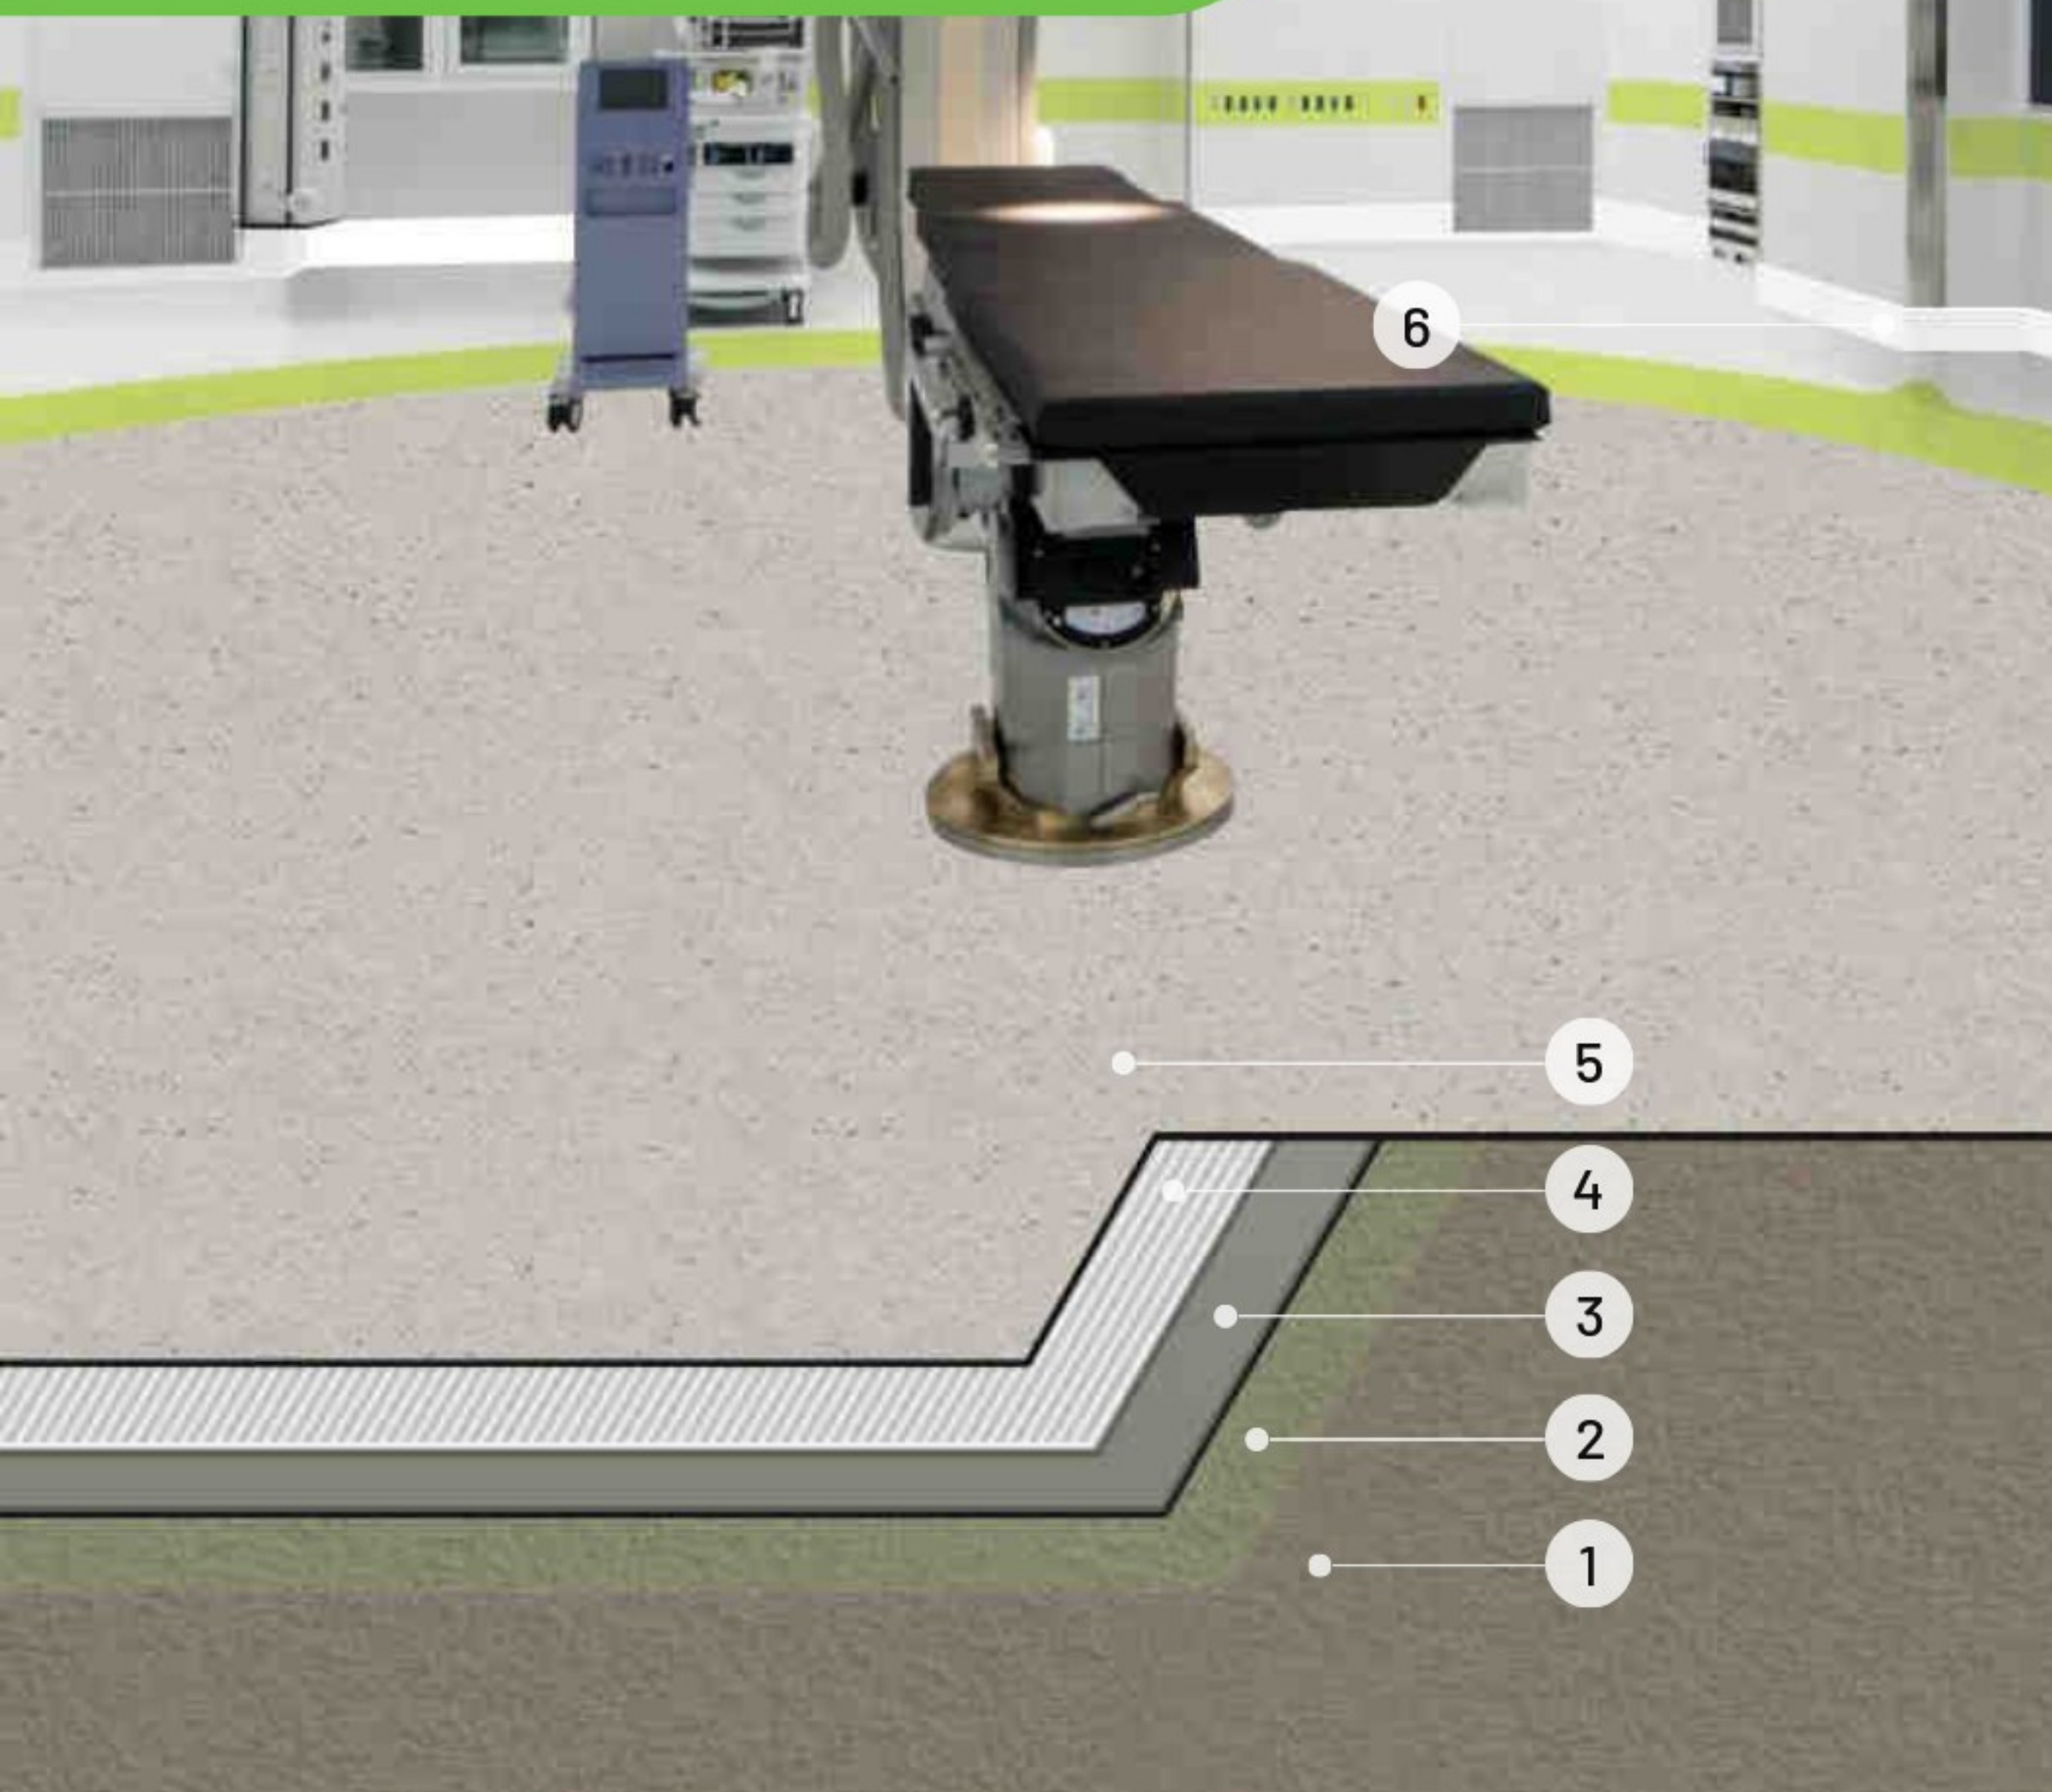


PRE-FINISHED PARQUET INSTALLATION SYSTEM



1	BASE: Properly prepared concrete substrate	4	 Adhesive V BOND CN 400
2	 Primer V BOND P120	5	Anti-Static Conductive Floor Covering
3	 Levelling compound V BOND SL40	6	 Contact Adhesive for PVC Skirting: ENIFIX 350

1	BASE: Properly prepared concrete substrate	4	 Adhesive V BOND 820
2	 Primer V BOND P120	5	PRE-FINISHED PARQUET
3	 Levelling compound V BOND SL40		

RAISED ACCESS FLOORING SYSTEM

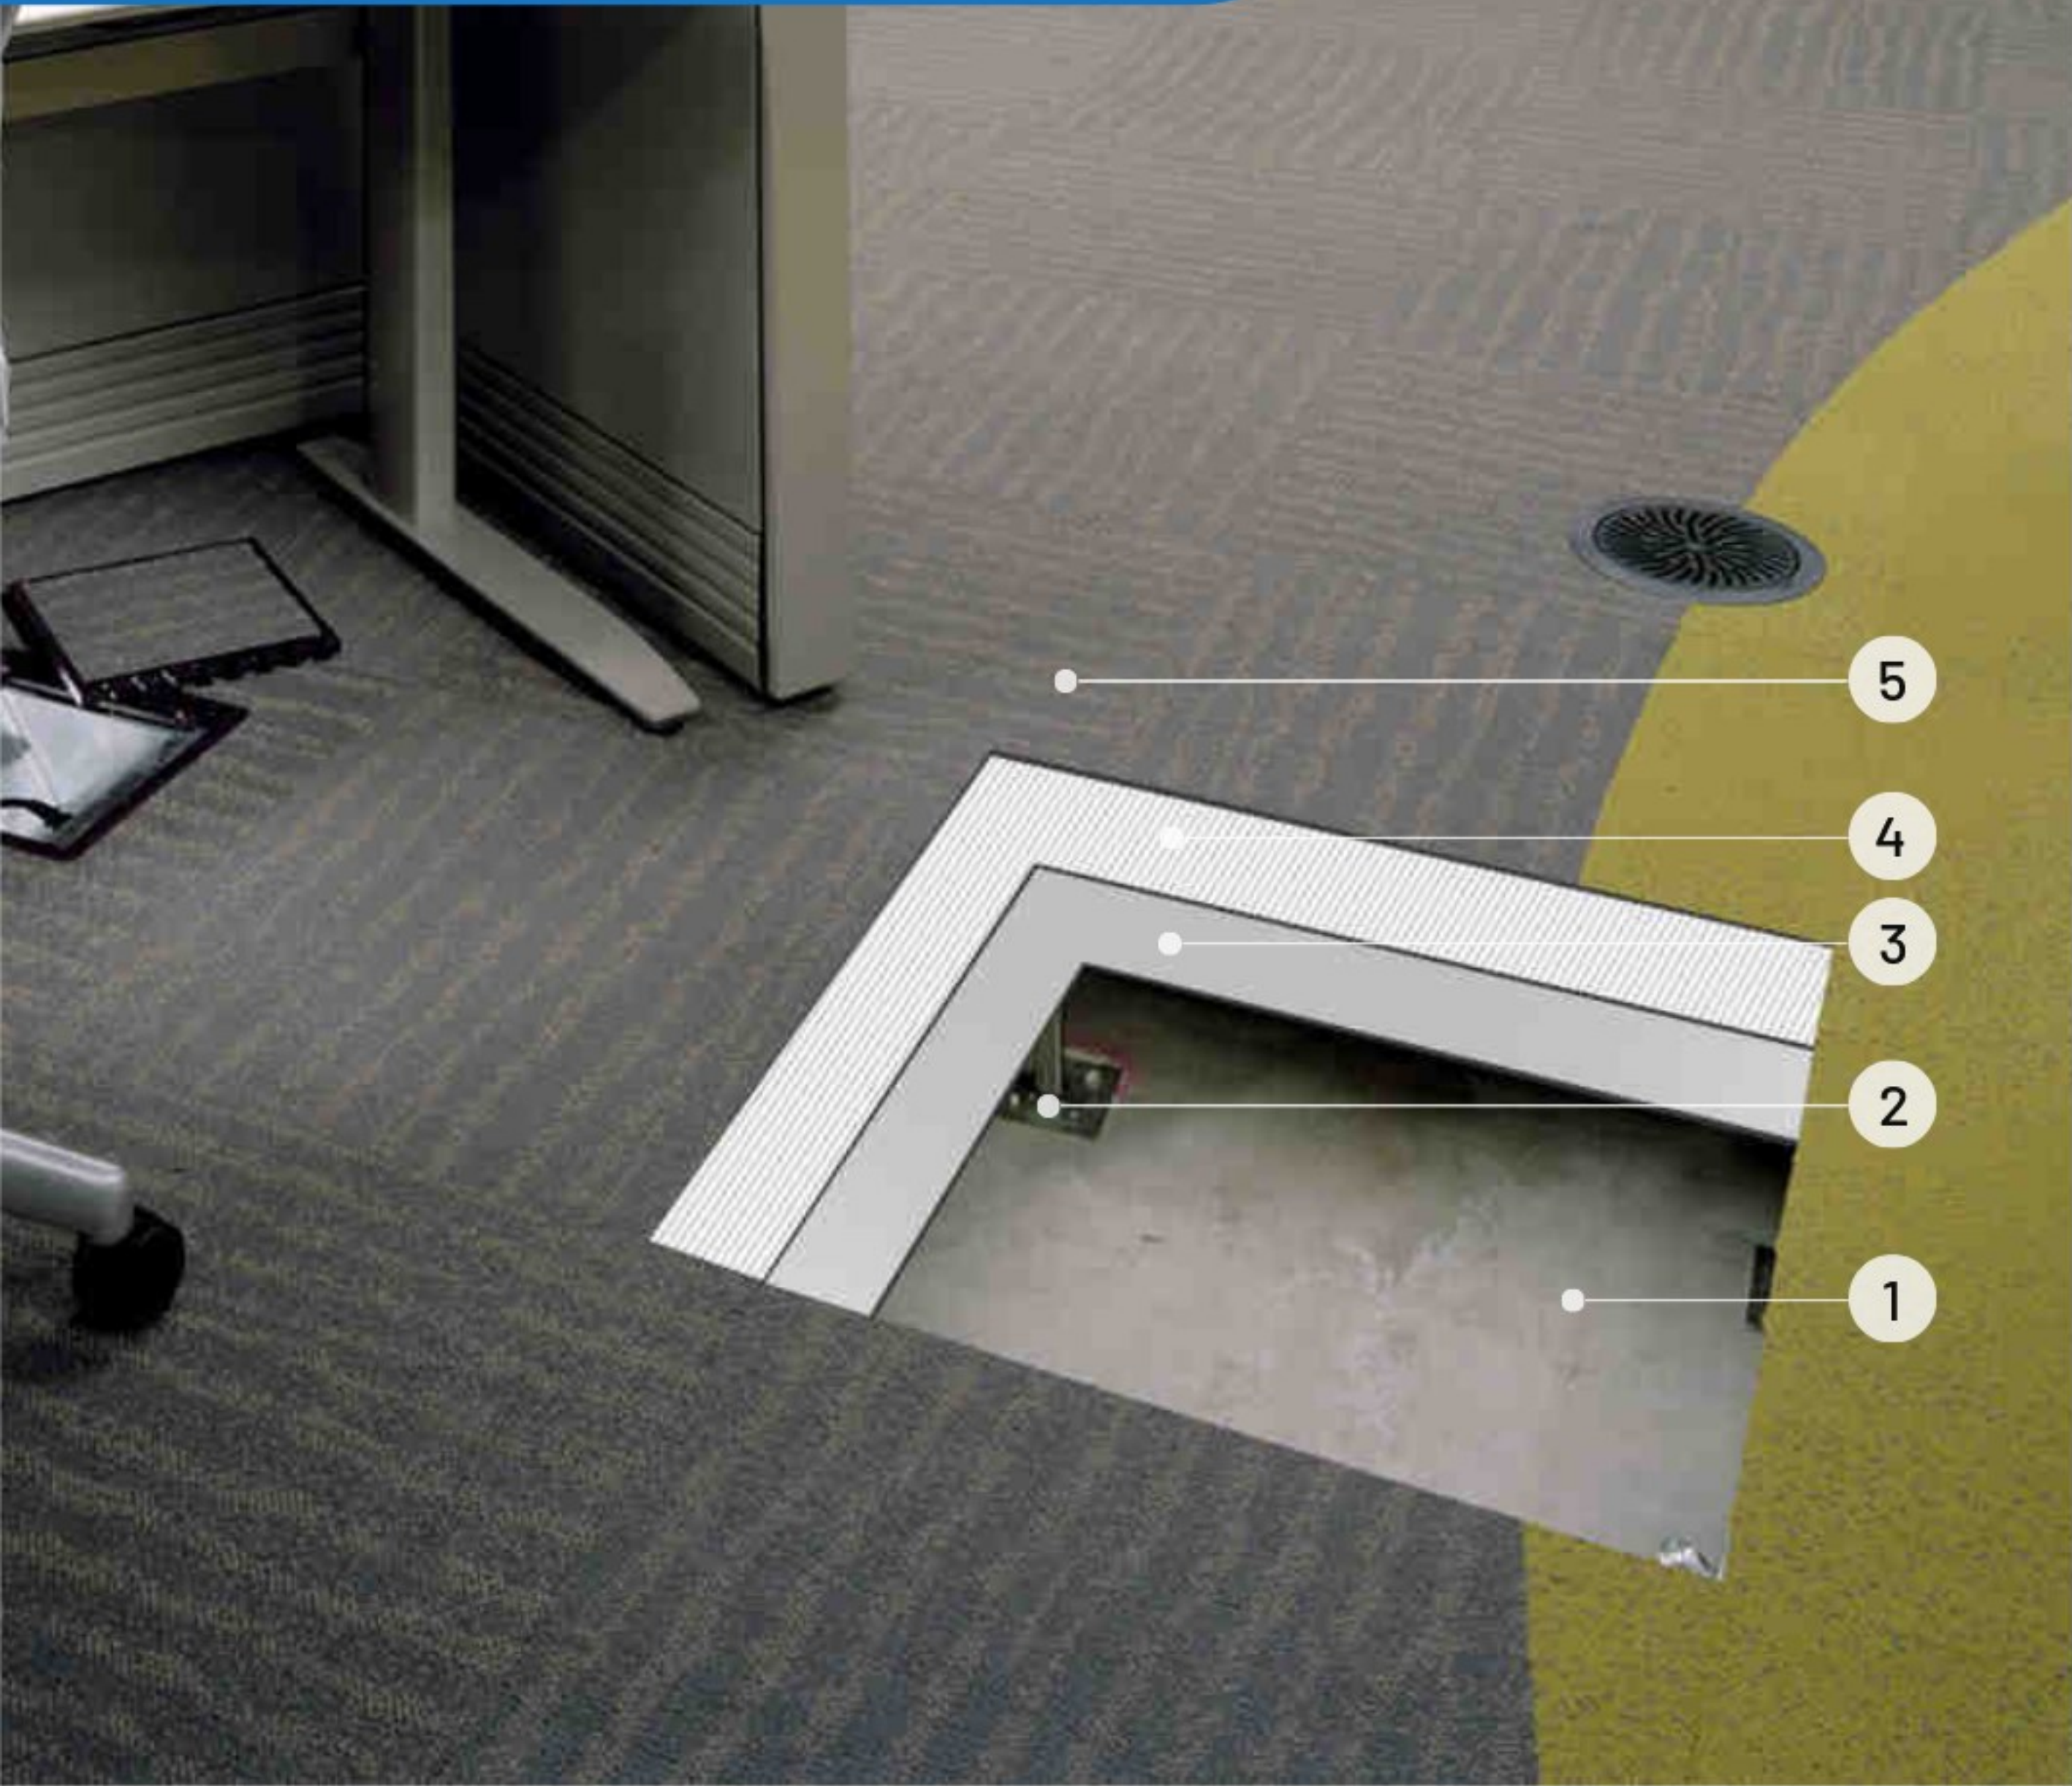

ADVANTAGES AND GLOBAL PRESENCE

GLOBALLY:
 5 OFFICES
 3 R&D CENTERS
 2 PRODUCTION PLANTS

HIGHLY ADVANCED KNOW-HOW
 ABILITY TO TAILOR
 MAKE PRODUCTS

ISO 9001: 2015 CERTIFIED
UL CERTIFIED PRODUCTS
LEED COMPLYING

EFFICIENT CUSTOMER SUPPORT
ADVANCED TECHNICAL SUPPORT

>10 YEARS OF EXPERIENCE
IN THE CHEMICALS INDUSTRY

DIVERSIFIED PRODUCT RANGE
COST EFFECTIVENESS



HERE WE'RE!

HEADQUARTER
 OFFICE
 PLANT
 R&D CENTER

- | | | | |
|---|--|---|--|
| 1 | BASE: Properly prepared concrete substrate | 4 | Adhesive
V BOND CT 400 ENIFIX CT |
| 2 | Pedestal Adhesive:
MASTERFIX 888 | 5 | Carpet Tiles/Luxury Vinyl Tiles (LVT) |
| 3 | Raised Access Flooring Enclosure | | |

PROFESSIONAL FLOORING

PREMIUM TWO COMPONENT POLYURETHANE ADHESIVE

V BOND 820 is a premium, two-component, polyurethane adhesive. V BOND 820 is moisture and weather resistant and suitable for both indoor and outdoor applications. V BOND 820 is ideal for bonding parquet, rubber tiles, carpets, concrete, glass, ceramic, quarry tiles, chipboard, plywood, hardboard, PVC sheets, PVC tiles, fiber/cement sheets and metals.

KEY FEATURE & PROPERTIES

- Excellent adhesion and bonding strength
- Resistant to chemicals after 7 days of application
- Usable immediately after curing
- Excellent water resistance
- Excellent heat resistance
- Coverage: 1.5-1.8 m²/kg
- Pot Life: 30 mins at 27°C

Packaging details

CONTENT	PACKAGING	PCS PER PALLET
8kg Kit	Pail + Can	96



V BOND 820



PREMIUM FLOORING ADHESIVE


V Bond 400 is a premium quality, low emission, high strength, water-based adhesive. V Bond 400 is based on a very special type of synthetic resin, with very high-performance additives, fine grade mineral fillers and tackifier. V BOND 400 is recommended for bonding of Vinyl Covering Tiles, Carpet tiles, PVC Sheets, EPDM Sheets, carpets to various substrates, PU foam to concrete, metal and wooden substrates.

Key Feature & Properties

- Low VOC & Low Odor
- High compatibility with various backings
- Excellent flow & spread properties
- High bonding & peel off strength
- High coverage
- Coverage: 4-5 m²/kg
- Open Time: 30-45 mins

Packaging details

CONTENT	PACKAGING	PCS PER PALLET
10kg	Pail	50
20kg	Pail	36

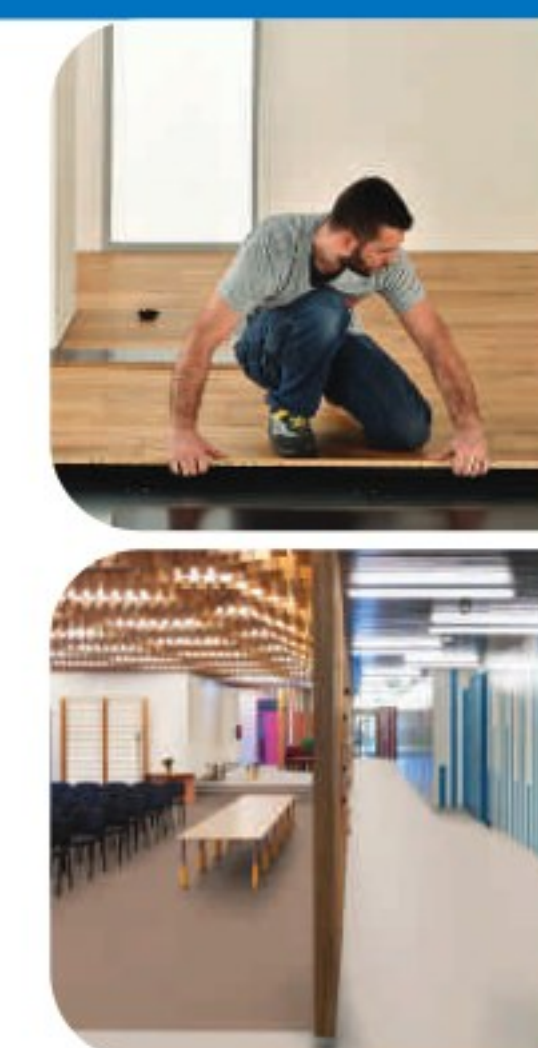

V BOND 400



TACKIFIER ADHESIVE FOR FLOORING

V BOND CT 400 is a high quality, solvent free, acrylic polymer, emulsion-based surface tackifier containing a blend of high-quality dispersions. V BOND CT 400 is an ideal product designed for adhering floor coverings, especially carpet tiles with felt, bitumen, PVC and other polymer backings to existing smooth floors and adhering underlays to sub-floors when using a release bond underlay system.

KEY FEATURE & PROPERTIES

- Low VOC & Low Odor
- Excellent flow & spread properties
- High compatibility with various backings
- Ideal for adhering underlays to sub-floors
- Allows easy replacement of tiles
- Coverage: 9-11 m²/kg
- Open Time: 30-60 mins

Packaging details

CONTENT	PACKAGING	PCS PER PALLET
10kg	Pail	50
20kg	Pail	36



V BOND CT 400



CONDUCTIVE FLOORING ADHESIVE

V BOND CN 400 is a premium quality, low emission, high strength, water-based adhesive that is specially formulated for conductive surfaces. V BOND CN 400 is recommended for bonding of PVC, rubber sheets, & tile coverings and similar flooring in all areas where discharges of static electricity are required. VBONDCN400 is widely used in areas like surgical rooms, chemical labs & data processing centres, etc.

KEY FEATURE & PROPERTIES

- Low VOC & Low Odor
- Excellent flow & spread properties
- High compatibility with conductive tiles
- High bonding strength
- High tensile strength
- Coverage: 3-4 m²/kg
- Open Time: 30-45 mins

Packaging details

CONTENT	PACKAGING	PCS PER PALLET
10kg	Pail	50
20kg	Pail	36



V BOND CN 400



SELF LEVELLING COMPOUND


V Bond SL40 is a high quality, cementitious self levelling compound used for levelling of floors before applying any modern flooring system, thus avoiding any surface irregularities. V Bond SL40 is a blend of specially selected cements, graded aggregates, polymers, plasticizers and a set of control additives to produce a smooth free flowing and self levelling material which can be laid to a feather edge.

KEY FEATURE & PROPERTIES

- Quick easy laying and fast hardening
- High compressive strength: >3500 PSI
- Specially developed for Middle East climatic conditions
- Ideal for levelling of floors before applying any modern flooring system
- Polymer modified formulation ensures excellent adhesion to prepared substrates
- Fluid consistency ensures that the product levels out to a smooth even surface upon pouring
- Coverage: 6.0-6.5 m²/25kg Bag (3 mm thickness)

Packaging details

CONTENT	PACKAGING	PCS PER PALLET
25kg	Paper Bag	60

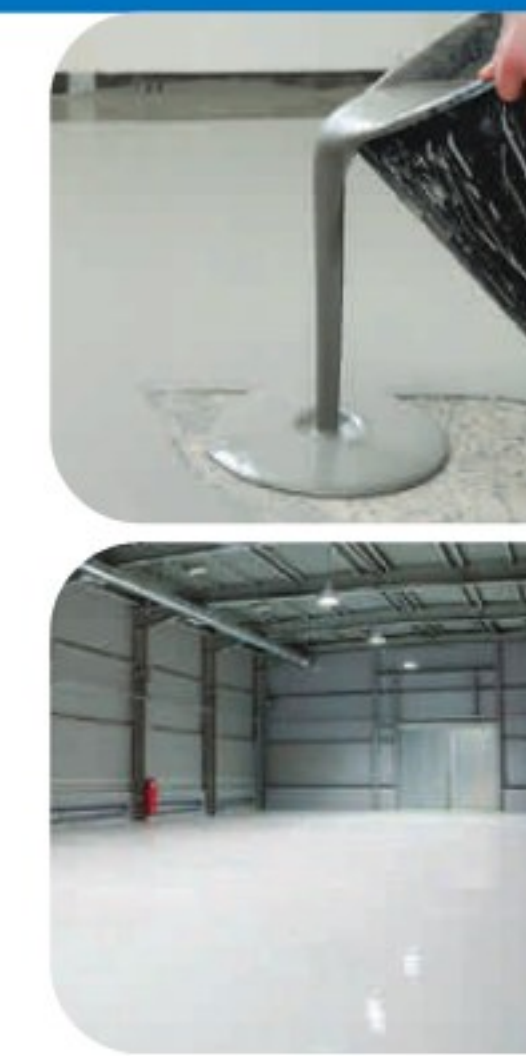

V BOND SL 40



DISPERSION PRIMER


V BOND P120 is a single component, dispersion primer specially developed to enhance the bonding strength of V BOND self levelling and smoothing compounds with absorbent screeds and concrete floors. V BOND P120 soaks into porous, absorbent subfloors and forms a closed film on dense, non-absorbent subfloors. It helps provide a smooth levelled surface.

Key Feature & Properties

- Boosts bonding strength of V BOND self levelling & smoothing compounds with absorbent screeds and concrete floors
- Soaks into porous, absorbent subfloors and forms a closed film on dense, non-absorbent subfloors
- Usable on porous and non-porous substrates
- Easy to apply to using a roller
- Excellent coverage
- Binds residual dust
- Coverage: 17.5-20.0 m²/kg

Packaging details

CONTENT	PACKAGING	PCS PER BOX	PCS PER PALLET
5kg	Jerry Can	4	120
20kg	Jerry Can	-	32

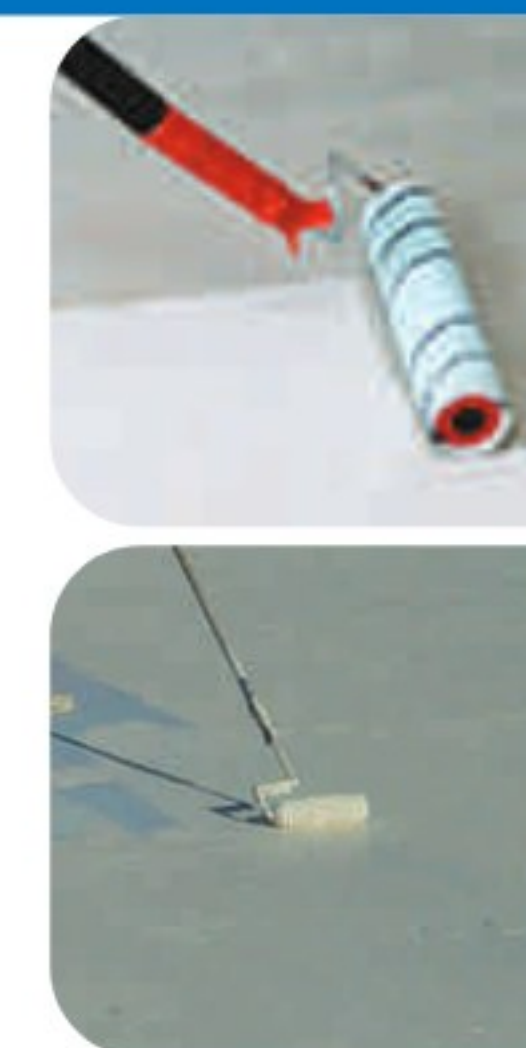

V BOND P120



GENERAL FLOORING

HIGH SOLID SOLVENT BASED CARPET ADHESIVE

ENIFIX CA 303 is a high coverage, one component contact adhesive based on Polychloroprene Rubber with special tackifier and additives. ENIFIX CA 303 is very good in film forming nature which gives uniform bonding to many surfaces. ENIFIX CA 303 is recommended for bonding of carpet backings with various substrates.

Key Feature & Properties

- Excellent bonding to porous and non-porous surfaces
- High compatibility with most carpet backings
- Excellent flow & spread properties
- Excellent Heat Resistance
- High bonding strength
- Coverage: 5-6 m²/kg
- Open Time: 5-15 mins

Packaging details

CONTENT	PACKAGING	PCS PER BOX	BOXES PER PALLET
650ml	Can	24	50



ENIFIX CA 303

PREMIUM CONTACT ADHESIVE

ENIFIX 350 is a premium quality, high performance, one component contact adhesive based on Polychloroprene Rubber. ENIFIX 350 is an ideal contact adhesive for wall skirting applications. Enifix 350 is recommended for bonding of EPDM, rubber, veneer, cork, laminates, PVC skirting, protection board, composite panels, felt, fiber, etc. Enifix 350 can also be used for handicraft work and repairing shoes, bags & toys.

KEY FEATURE & PROPERTIES

- Excellent bonding to porous and non-porous surfaces
- Highly suitable for multi material applications
- Excellent adhesion & high bonding strength
- Excellent flow & spread properties
- Excellent Heat Resistance
- Coverage: 4-6 m²/kg
- Open Time: 5-15 mins

Packaging details

CONTENT	PACKAGING	PCS PER BOX	BOXES PER PALLET
650ml	Can	12	60



ENIFIX 350

GENERAL PURPOSE CARPET ADHESIVE

ENIFIX 711 is a general-purpose contact adhesive based on Polychloroprene Rubber. ENIFIX 711 is strong, long lasting, easy to use and highly suitable for fixing carpet or high shear-based bonding. ENIFIX 711 is an ideal product for bonding carpet backings with various substrates. ENIFIX 711 is also suitable for adhering floor coverings, especially carpet tiles with felt, bitumen, PVC and other polymer backings to existing smooth floors.

KEY FEATURE & PROPERTIES

- ➡ Excellent bonding to porous and non-porous surfaces
- ➡ Suitable for use with material under tension
- ➡ Excellent adhesion and bonding strength
- ➡ Compatible with most carpet backings
- ➡ Excellent flow and spread properties
- ➡ Coverage: 3.0-5.8 m²/kg
- ➡ Open Time: 5-20 mins

Packaging details

CONTENT	PACKAGING	PCS PER BOX	BOXES PER PALLET
2.5kg	Square Can	4	72



ENIFIX 711



SOLVENT BASED CARPET ADHESIVE


I-FIX 5033 is a one component solvent-based contact adhesive based on Polychloroprene Rubber. I- FIX 5033 is strong, economical, long lasting, easy to use and highly suitable for multi-material assembling jobs. I-FIX 5033 is an ideal adhesive used in bonding applications of carpet backings and various floor coverings.

KEY FEATURE & PROPERTIES

- ➡ Good bonding to porous and non-porous surfaces
- ➡ Suitable for use with material under tension
- ➡ Good adhesion and bonding strength
- ➡ Compatible with most carpet backings
- ➡ Good flow and spread properties
- ➡ Coverage: 2.0-4.0 m²/kg
- ➡ Open Time: 5-20 mins

Packaging details

CONTENT	PACKAGING	PCS PER BOX	BOXES PER PALLET
2.5kg	Square Can	4	72

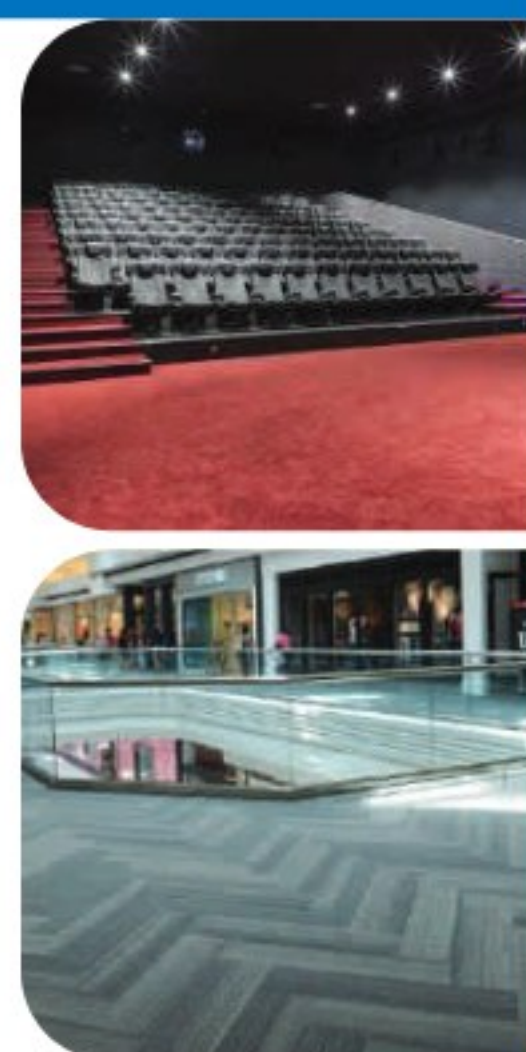

I-FIX 5033



NOTES

[illegible]